

0CD50-M04390EN

P R E F A C E


This parts catalog is the 1st edition of 4TNV84T-ZXKAT for Agritech.

Published : January, 2019

Contents

0CD50-M04390

Fig. No.	Fig. Name	Fig. No.	Fig. Name
ENGINE			
1.	CYLINDER BLOCK		
2.	GEAR HOUSING		
3.	OIL SUMP		
4.	CYLINDER HEAD & BONNET		
5.	SUCTION MANIFOLD		
6.	EXHAUST MANIFOLD		
7.	CAMSHAFT & DRIVING GEAR		
8.	TURBINE		
9.	CRANKSHAFT & PISTON		
10.	BALANCER		
11.	LUB. OIL SYSTEM		
12.	LUB. OIL PIPE		
13.	COOLING WATER SYSTEM		
14.	FUEL INJECTION PUMP		
15.	GOVERNOR		
16.	FUEL INJECTION VALVE		
17.	ELECTRONIC CONTROL UNIT(ECU)		
18.	STARTER MOTOR		
19.	ACCESSORY		

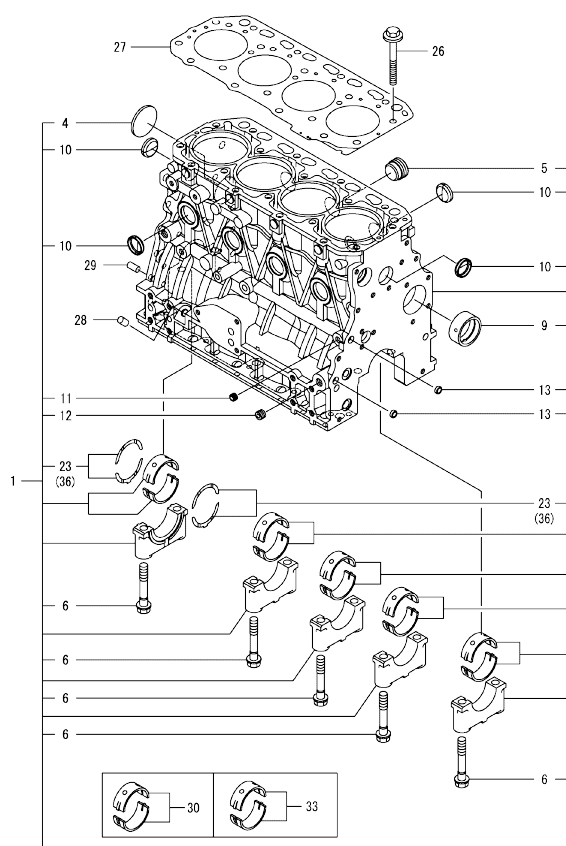


No.	Lev.	Parts No.	Description	(A)	(B)	(C)	(D)	(E)	(F)	I	R
1	1	729508-01570	BLOCK ASSY, CYLINDER	1							
4	2	129001-01250	PLUG, 50	1							
5	2	171051-01921	PLUG, NPTF1	1							
6	2	129150-02020	BOLT, METAL CAP	10							
9	2	129795-02412	BUSH, CAMSHAFT	1							
10	2	27241-300000	PLUG 30	8							
11	2	124060-01050	PLUG, PT1/8	1							
12	2	124160-01910	PLUG, PT1/4	2							
13	2	27241-120000	PLUG, 12	2							
23	2	129150-02931	METAL ASSY, THRUST	2							
26	1	129150-01200	BOLT, CYLINDER HEAD	18							
27	1	129508-01330	GASKET, HEAD	1							
28	1	119309-01810	PLUG	1							
29	1	129100-01580	PIN, PARALLEL 8X16	2							
30	1	129001-02931	METAL ASSY, MAIN	5							1
33	1	129150-02871	METAL ASSY, MAIN .25	5							2
36	1	129150-02941	METAL ASSY, 0.25 OS	1							3

Remarks
(1) Spare parts.
(2) Under-sized (U.S.=0.25) parts.
(3) Over-sized (O.S.=0.25) parts.

N:Old ^{Yes}/_{No} New. Q:Old ^{No}/_{Yes} New. R:Old ^{Yes}/_{Yes} New. S:Old ^{No}/_{No} New. W:Add. Z:Discontinued. F:Interchangeable by set. K:Qty Change

Fig.2. GEAR HOUSING

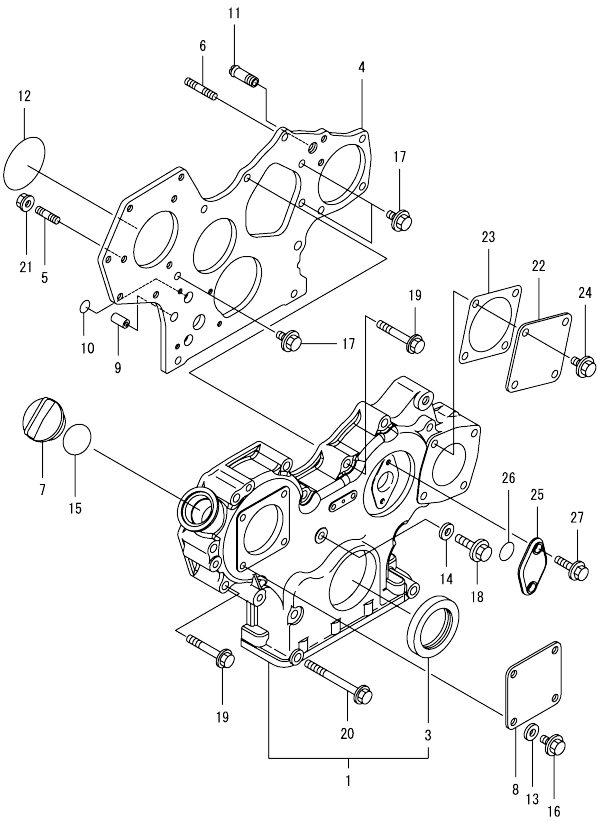

(A)=4TNV84T-ZXKAT
(B)=
(C)=


(D)=
(E)=
(F)=

No.	Lev.	Parts No.	Description	Q'ty						I	R
				(A)	(B)	(C)	(D)	(E)	(F)		
1	1	729008-01500	CASE ASSY, GEAR	1							
3	2	119934-01800	SEAL, OIL	1							
4	1	129009-01530	FLANGE, GEAR CASE	1							
5	1	119802-01561	STUD, M8X25	3							
6	1	129150-01580	BOLT, PUMP M8X30	1							
7	1	124160-01751	CAP, FILLER	1							
8	1	124240-01871	COVER, HYDRAULIC PUMP	1							
9	1	129795-01950	PIPE, KNOCK L=18	2							
10	1	119609-32040	O-RING, P16	2							
11	1	129122-44480	JOINT, PT1/4	1							
12	1	121850-51960	O-RING, FUEL PUMP	1							
13	1	22190-080002	WASHER, SEAL 8	4							
14	1	22190-080002	WASHER, SEAL 8	1							
15	1	24311-000320	O-RING, 1AP32.0	1							
16	1	26106-080162	BOLT, M8X 16 PLATED	4							
17	1	26106-080162	BOLT, M8X 16 PLATED	3							
18	1	26106-080302	BOLT, M8X 30 PLATED	1							
19	1	26106-080552	BOLT, M8X 55 PLATED	11							
20	1	26106-080852	BOLT, M8X 85 PLATED	3							
21	1	26306-080002	NUT, M8	3							
22	1	124240-01871	COVER, HYDRAULIC PUMP	1							
23	1	129C26-01890	GASKET, PUMP	1							
24	1	26106-080122	BOLT, M8X 12 PLATED	4							
25	1	121023-01551	COVER, TACHOMETER	1							
26	1	24341-000240	O-RING, 1AS24.0	1							
27	1	26106-060162	BOLT, M6X 16 PLATED	2							



				(A)=4T9V84T-ZXKAT							(D)=		
				(B)=							(E)=		
				(C)=							(F)=		
No.	Lev.	Parts No.	Description	(A)	(B)	(C)	(D)	(E)	(F)	Q'ty	I	R	
1	1	129550-01702	OIL PAN	1									
2	1	729429-01721	OIL PAN ASSY	1									
3	2	105425-01690	PLUG, DRAIN M16	1									
5	2	22190-160002	WASHER, SEAL 16	1									
6	1	129555-01750	PIPE, KNOCK 14X19	1									
7	1	26106-080122	BOLT, M8X 12 PLATED	20									
8	1	26106-080502	BOLT, M8X 50 PLATED	8									
9	1	26106-081002	BOLT, M8X100 PLATED	14									
10	1	26106-081202	BOLT, M8X120 PLATED	4									
11	1	129100-01580	PIN, PARALLEL 8X16	2									
12	1	129648-01600	CASE ASSY, OIL SEAL	1									
14	2	129648-01780	SEAL, OIL	1									
15	1	129486-01670	BOLT, M8X30	9									

Fig.4. CYLINDER HEAD & BONNET

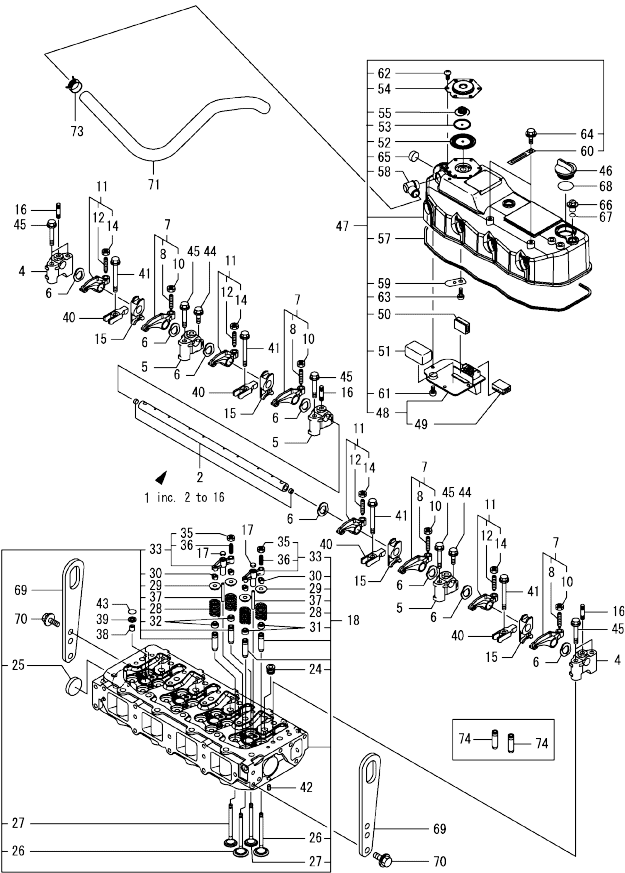

Remarks
(1)Spare parts.


(A)=4TNV84T-ZXKAT
(B)=
(C)=

(D)=
(E)=
(F)=

No.	Lev.	Parts No.	Description	Q'ty						I	R
				(A)	(B)	(C)	(D)	(E)	(F)		
1	1	129508-11241	SHAFT ASSY, ROCKER	1							
2	2	129508-11250	SHAFT, ROCKER ARM	1							
4	2	129508-11260	SUPPORT, ROCKER A	2							
5	2	129508-11270	SUPPORT, ROCKER B	3							
6	2	129508-11280	WASHER, WAVE	8							
7	2	129508-11650	ARM ASSY, ROCKER INT	4							
8	3	129150-11230	SCREW, VALVE ADJUST	4							
10	3	129150-11750	NUT, M8XP1.0	4							
11	2	129508-11660	ARM ASSY, ROCKER EXH	4							
12	3	129150-11230	SCREW, VALVE ADJUST	4							
14	3	129150-11750	NUT, M8XP1.0	4							
15	2	129508-11920	RETAINER, NOZZLE	4							
16	2	26226-080352	STUD, M8X 35	3							
17	1	123907-11550	SEAT, VALVE BRIDGE	8							
18	1	129509-11700	HEAD ASSY, CYLINDER	1							
24	2	23876-020000	PLUG, R02	4							
25	2	27241-400000	PLUG, 40	2							
26	2	129508-11100	VALVE, INTAKE	8							
27	2	129508-11110	VALVE, EXHAUST	8							
28	2	129508-11130	SPRING, VALVE	16							
29	2	129508-11180	RETAINER, SPRING	16							
30	2	119717-11190	COTTER, VALVE	32							
31	2	119717-11340	SEAL, VALVE STEM	8							
32	2	119717-11350	SEAL, VALVE STEM	8							
33	2	129672-11510	BRIDGE ASSY, VALVE	8							
35	3	129150-11750	NUT, M8XP1.0	8							
36	3	123907-11830	ADJUSTER, BRIDGE	8							
37	2	129508-11820	GUIDE, BRIDGE	8							
38	1	119802-11870	PROTECTOR, NOZZLE	4							
39	1	119625-11880	SEAT, NOZZLE	4							
40	1	129508-11900	RETAINER, NOZZLE	4							
41	1	129907-11950	BOLT, VALVE HOLDER	4							
42	1	22351-060012	PIN, SPRING 6.0X12	2							
43	1	24311-000120	O-RING, 1AP12.0	4							
44	1	26106-080252	BOLT, M8X 25 PLATED	3							
45	1	26106-080502	BOLT, M8X 50 PLATED	7							
46	1	124160-01751	CAP, FILLER	1							
47	1	129530-11360	BONNET ASSY, HEAD	1							
48	2	129508-03010	PLATE, BAFFLE	1							
49	3	119802-03070	BAFFLE, BREATHER	1							
50	2	129150-03070	BAFFLE, BREATHER	1							
51	2	129907-03070	BAFFLE, BREATHER	1							
52	2	123907-03100	DIAPHRAGM, BREATHER	1							
53	2	123907-03110	PLATE, CENTER	1							
54	2	129922-03120	PLATE, BREATHER	1							
55	2	123907-03140	SPRING, DIAPHRAGM	1							
57	2	129508-11310	GASKET, BONNET	1							
58	2	119100-11330	ELBOW, BREATHER	1							
59	2	129009-11340	SPRING, PLATE	1							
60	2	129509-79700	CLAMP, 140-M6	1							
61	2	22857-500100	SCREW, 5X10	4							

N:Old, New, Q:Old, New, R:Old, New, S:Old, New, W:Add, Z:Discontinued, F:Interchangeable by set, K:Q'ty Change
++ CONTINUE ++
Copyright (C) 2019 YANMAR GLOBAL CS CO., LTD. All Rights Reserved.

Fig.4. CYLINDER HEAD & BONNET

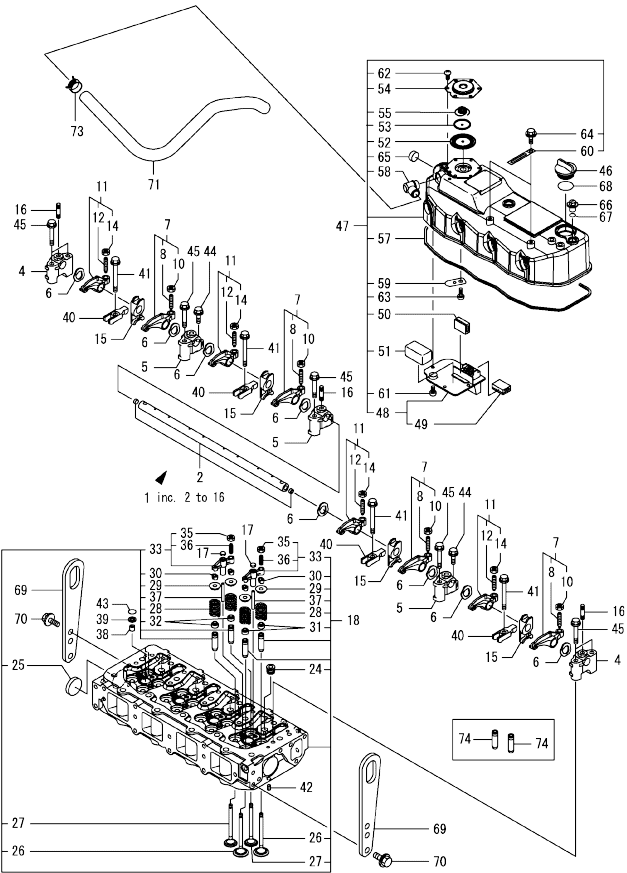


Remarks
(1)Spare parts.

(A)=4TNV84T-ZXKAT
(B)=
(C)=

(D)=
(E)=
(F)=

No.	Lev.	Parts No.	Description	Q'ty						I	R
				(A)	(B)	(C)	(D)	(E)	(F)		
62	2	22857-500100	SCREW, 5X10	6							
63	2	22857-500100	SCREW, 5X10	1							
64	2	26106-060122	BOLT, M6X 12 PLATED	1							
65	2	27241-180000	PLUG, 18	1							
66	1	124160-11360	KNOB, BONNET	3							
67	1	24311-000120	O-RING, 1AP12.0	3							
68	1	24311-000320	O-RING, 1AP32.0	1							
69	1	129900-07900	LIFTER, ENGINE	2							
70	1	26106-080162	BOLT, M8X 16 PLATED	4							
71	1	129633-03000	HOSE ASSY, BREATHER	1							
73	1	129960-03990	CLAMP, HOSE 19.8	1							
74	1	119717-11800	GUIDE, VALVE	16							1


OCD50-M04390 ENGINE
Fig.5. SUCTION MANIFOLD

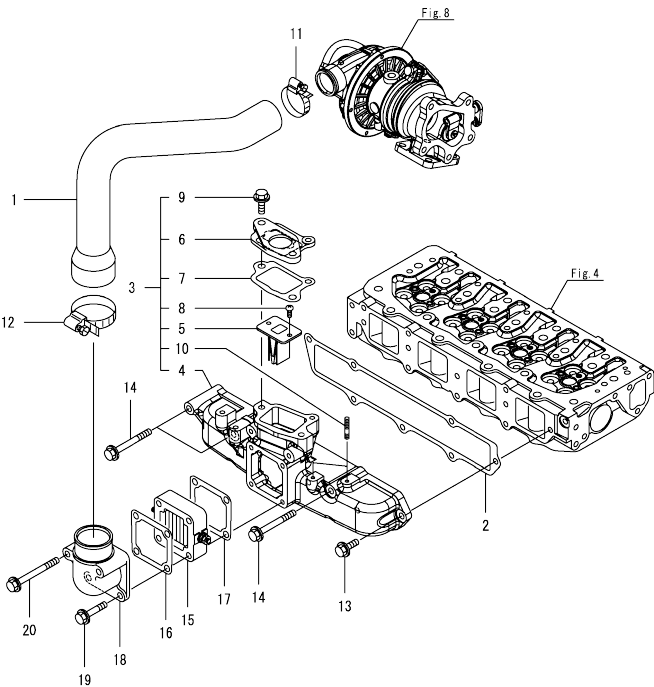

OCD50-M04390 Fig.5

No.	Lev.	Parts No.	Description	Q'ty						I	R
				(A)	(B)	(C)	(D)	(E)	(F)		
1	1	129558-12070	HOSE, AIR INTAKE	1							
2	1	129508-12110	GASKET, MANIFOLD	1							
3	1	129558-12160	MANIFOLD ASSY,INTAKE	1							
4	2	129558-12110	MANIFOLD, INTAKE	1							
5	2	129509-13700	VALVE, REED	1							
6	2	129509-13710	SPACER, EGR VALVE	1							
7	2	129509-13720	GASKET	1							
8	2	22857-500160	SCREW, 5X16	2							
9	2	26106-080202	BOLT, M8X 20 PLATED	1							
10	2	26216-060252	STUD, M6X 25	2							
11	1	23000-054000	CLAMP, 54	1							
12	1	23000-070000	CLAMP, 70	1							
13	1	26106-080202	BOLT, M8X 20 PLATED	4							
14	1	26106-080702	BOLT, M8X 70 PLATED	3							
15	1	129100-77501	HEATER, AIR 11V	1							
16	1	129100-77510	GASKET, AIR HEATER	1							
17	1	129150-77511	GASKET, AIR HEATER	1							
18	1	171340-77520	BEND, AIR HEATER	1							
19	1	26106-080402	BOLT, M8X 40 PLATED	2							
20	1	26106-080802	BOLT, M8X 80 PLATED	2							

Fig.6. EXHAUST MANIFOLD

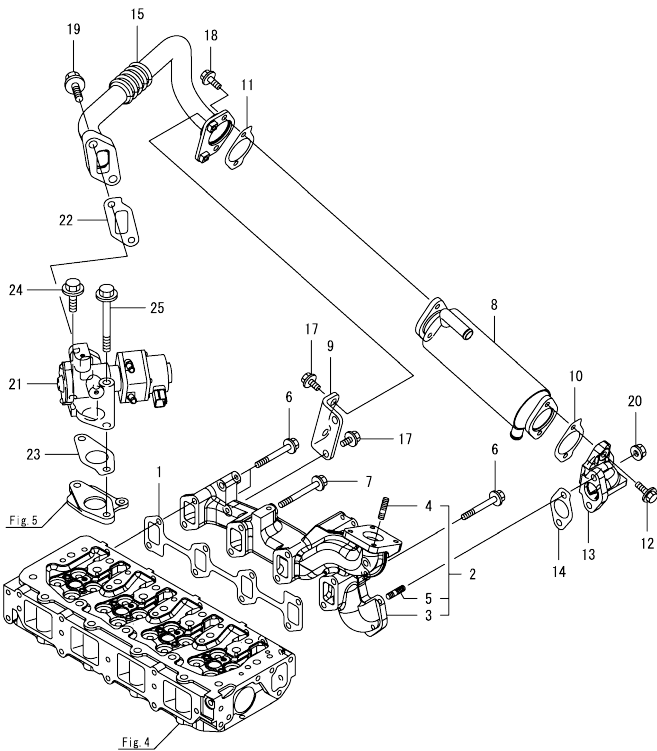


(A)=4TNV84T-ZXKAT
(B)=
(C)=

(D)=
(E)=
(F)=

No.	Lev.	Parts No.	Description	Q'ty						I	R
				(A)	(B)	(C)	(D)	(E)	(F)		
1	1	129550-13110	GASKET, MANIFOLD	1							
2	1	129558-13160	MANIFOLD ASSY	1							
3	2	129558-13110	MANIFOLD, EXHAUST	1							
4	2	129418-18320	STUD, M8X20	4							
5	2	129418-18320	STUD, M8X20	2							
6	1	119802-13651	BOLT, M8X65 10.9T	3							
7	1	119802-13661	BOLT, M8X75 10.9T	5							
8	1	129509-13400	COOLER ASSY, EGR	1							
9	1	129558-13410	STAY, EGR COOLER	1							
10	1	129928-13410	GASKET, EGR COOLER	1							
11	1	129928-13410	GASKET, EGR COOLER	1							
12	1	119802-13791	BOLT, M8X25 10.9T	2							
13	1	129928-13800	PIPE, EGR INLET	1							
14	1	129927-13810	GASKET, EGR PIPE	1							
15	1	129558-13840	PIPE ASSY, EGR	1							
17	1	26106-080162	BOLT, M8X 16 PLATED	4							
18	1	26106-080202	BOLT, M8X 20 PLATED	2							
19	1	26106-100302	BOLT, M10X 30 PLATED	2							
20	1	26306-080002	NUT, M8	2							
21	1	129928-13900	VALVE, EGR	1							
22	1	129927-13910	GASKET, EGR	1							
23	1	129927-13920	GASKET, EGR	1							
24	1	26106-100402	BOLT, M10X 40 PLATED	1							
25	1	26106-101052	BOLT, M10X105 PLATED	1							

Fig.7. CAMSHAFT & DRIVING GEAR

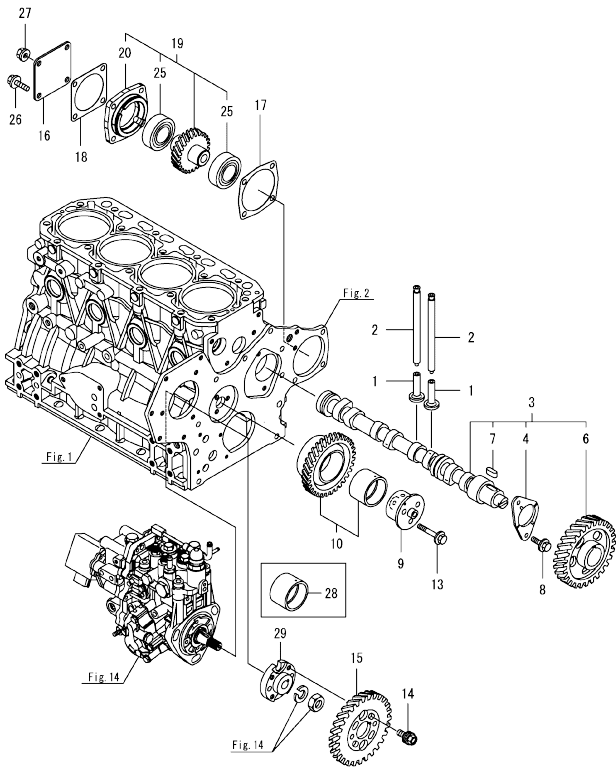


(A)=4TNV84T-ZXKAT
(B)=
(C)=

(D)=
(E)=
(F)=

No.	Lev.	Parts No.	Description	Q'ty						I	R
				(A)	(B)	(C)	(D)	(E)	(F)		
1	1	129150-14200	TAPPET	8							
2	1	129150-14400	ROD, PUSH L=178	8							
3	1	129508-14580	CAMSHAFT ASSY	1							
4	2	129150-02450	METAL, THRUST	1							
6	2	129150-14101	GEAR, CAMSHAFT	1							
7	2	22512-070140	KEY, 7X 14	1							
8	1	26106-080142	BOLT, M8X 14 PLATED	2							
9	1	119803-25050	SHAFT, IDLE GEAR	1							
10	1	119802-25101	GEAR ASSY, IDLE	1							
13	1	26106-080402	BOLT, M8X 40 PLATED	3							
14	1	129150-25301	BOLT, INJECTION PUMP	4							
15	1	119802-25901	GEAR, PUMP	1							
16	1	124240-01871	COVER, HYDRAULIC PUMP	1							
17	1	129150-01881	GASKET, PUMP COVER	1							
18	1	129C26-01890	GASKET, PUMP	1							
19	1	129555-26000	DRIVE ASSY, PUMP	1							
20	2	129150-26050	BRACKET, PUMP	1							
25	2	24105-060064	BEARING, BALL 6006Z	2							
26	1	26106-080302	BOLT, M8X 30 PLATED	3							
27	1	26306-080002	NUT, M8	1							
28	1	119802-25071	BUSH, IDLE GEAR	1							1
29	1	158552-51151	FLANGE, CAMSHAFT	1							

Remarks
(1)Spare parts.

OCD50-M04390 ENGINE
Fig.8. TURBINE

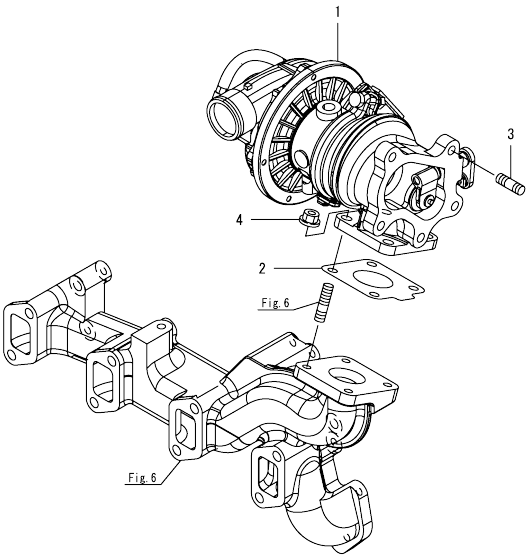

OCD50-M04390 Fig.8

(A)=4TNV84T-ZXKAT

(D)=

(B)=

(E)=

(C)=

(F)=

No.

Lev.

Parts No.

Description

(A)

(B)

(C)

(D)

(E)

(F)

I

R

1129508-18011TURBOCHARGER, RHF41

2129508-18080GASKET, TURBINE IN1

3129418-18320STUD, M8X205

4126306-080002NUT, M85

N:Old

YES

NO

New.

Q:Old

YES

NO

New.

R:Old

YES

NO

New.

S:Old

YES

NO

New.

W:Add.


Z:Discontinued.

F:Interchangeable by set.

K:Qty Change


Copyright (C) 2019 YANMAR GLOBAL CS CO., LTD. All Rights Reserved.

Fig.9. CRANKSHAFT & PISTON

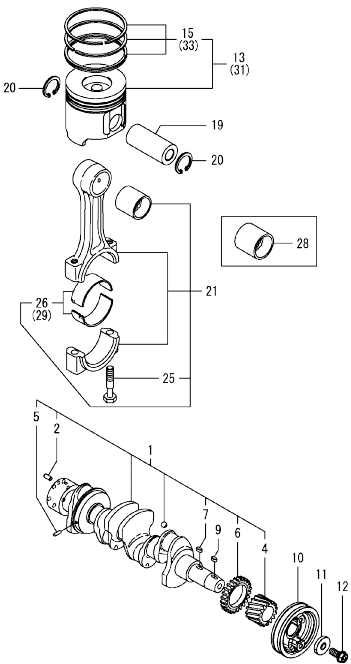


Remarks
(1)Spare parts.
(2)Under-sized(U.S.=0.25) parts.
(3)Over-sized(O.S.=0.25) parts.

No.	Lev.	Parts No.	Description	Q'ty						I	R
				(A)	(B)	(C)	(D)	(E)	(F)		
1	1	129558-21000	CRANKSHAFT ASSY	1							
2	2	129100-01580	PIN, PARALLEL 8X16	1							
4	2	119803-21200	GEAR, CRANKSHAFT	1							
5	2	121850-21290	PIN, CRANK GEAR	1							
6	2	129400-28121	GEAR, BALANCER	1							
7	2	22512-070140	KEY, 7X 14	1							
9	1	22512-070140	KEY, 7X 14	1							
10	1	129623-21650	V-PULLEY, CRANKSHAFT	1							
11	1	129795-21661	WASHER, 14	1							
12	1	121850-21680	BOLT, V-PULLEY	1							
13	1	129509-22080	PISTON ASSY	4							
15	2	129509-22500	RING SET, PISTON	4							
19	1	129202-22300	PIN, PISTON D26 L70	4							
20	1	22252-000260	RING, 26	8							
21	1	729402-23100	ROD ASSY, CONNECTING	4							
25	2	121550-23200	BOLT, CONNECTING ROD	8							
26	2	129150-23601	METAL ASSY,CRANK PIN	4							
28	1	129100-23910	METAL, PISTON PIN	4							1
29	1	129150-23611	METAL, CRANK PIN .25	4							2
31	1	129509-22900	PISTON ASSY, 0.25 OS	1							3
33	2	129509-22950	RING SET, PISTON .25	1							3

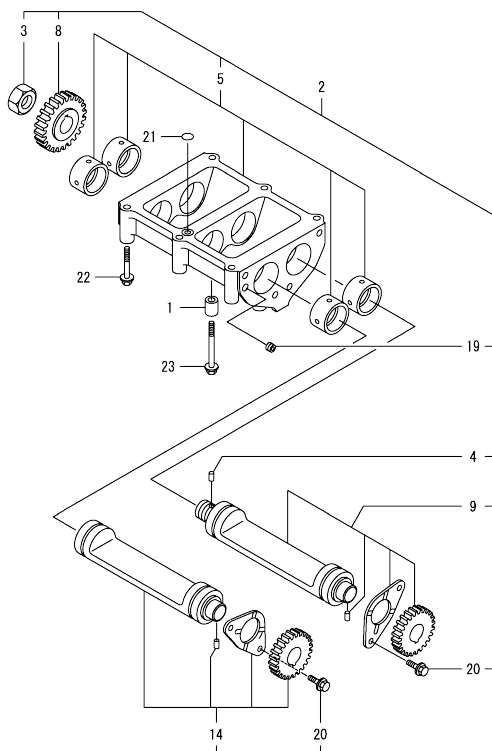

No.	Lev.	Parts No.	Description	Q'ty						I	R
				(A)	(B)	(C)	(D)	(E)	(F)		
1	1	129795-01960	PIPE, KNOCK 11X12	2							
2	1	129457-28000	BALANCER ASSY	1							
3	2	128170-14150	NUT, CAM	1							
4	2	121850-21290	PIN, CRANK GEAR	1							
5	2	129457-28011	CASE ASSY, BALANCER	1							
8	2	129400-28150	GEAR, BALANCER A	1							
9	2	729490-28510	SHAFT ASSY, BALANCER	1							
14	2	729490-28520	SHAFT ASSY, BALANCER	1							
19	2	23876-005000	PLUG, R005	1							
20	2	26106-080142	BOLT, M8X 14 PLATED	4							
21	1	24311-000140	O-RING, 1AP14.0	1							
22	1	26106-080602	BOLT, M8X 60 PLATED	4							
23	1	26106-080802	BOLT, M8X 80 PLATED	2							

Fig.11. LUB. OIL SYSTEM

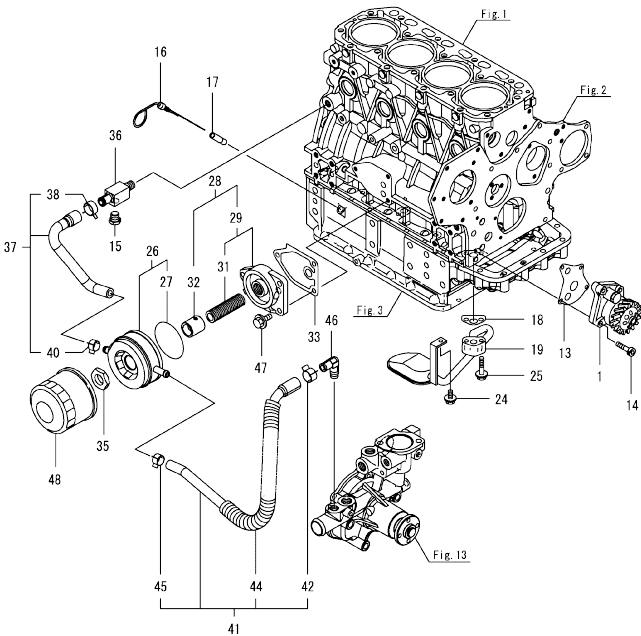


(A)=4TNV84T-ZXKAT
(B)=
(C)=

(D)=
(E)=
(F)=

No.	Lev.	Parts No.	Description	Q'ty						I	R
				(A)	(B)	(C)	(D)	(E)	(F)		
1	1	129418-32001	PUMP ASSY, OIL	1							
13	1	129150-32020	GASKET, PUMP	1							
14	1	26450-060252	BOLT, M6X 25	4							
15	1	171056-49120	PLUG, DRAIN R1/4	1							
16	1	129457-34800	DIPSTICK, OIL	1							
17	1	121520-34810	GUIDE, DIPSTICK	1							
18	1	129150-35042	GASKET, INLET PIPE	1							
19	1	129550-35090	PIPE ASSY, OIL INLET	1							
24	1	26106-080122	BOLT, M8X 12 PLATED	1							
25	1	26106-080352	BOLT, M8X 35 PLATED	2							
26	1	129508-33031	COOLER ASSY, OIL	1							
27	2	129508-33060	GASKET, COOLER	1							
28	1	129508-35100	BRACKET ASSY, LO FILT	1							
29	2	129006-35100	BRACKET ASSY, FILTER	1							
31	3	129417-35150	STUD, M20X67	1							
32	2	129508-35150	COLLAR, OIL-COOLER	1							
33	1	129150-35111	GASKET, BRACKET	1							
35	1	124085-35350	NUT, M20	1							
36	1	129006-44480	JOINT, R02	1							
37	1	129508-49030	HOSE ASSY, COOLER IN	1							
38	2	171008-03990	CLAMP, HOSE 18.5	1							
40	2	23080-015000	CLAMP, 15	1							
41	1	129508-49040	HOSE ASSY, COOLER OUT	1							
42	2	171008-03990	CLAMP, HOSE 18.5	1							
44	2	119940-59130	TUBE, CORRUGATED 19	1							
45	2	23080-015000	CLAMP, 15	1							
46	1	129103-49301	ELBOW, PT1/4	1							
47	1	26106-080202	BOLT, M8X 20 PLATED	3							
48	1	119005-35151	FILTER, OIL D80X100	1							1

Remarks
(1)Spare parts.

Fig.12. LUB. OIL PIPE

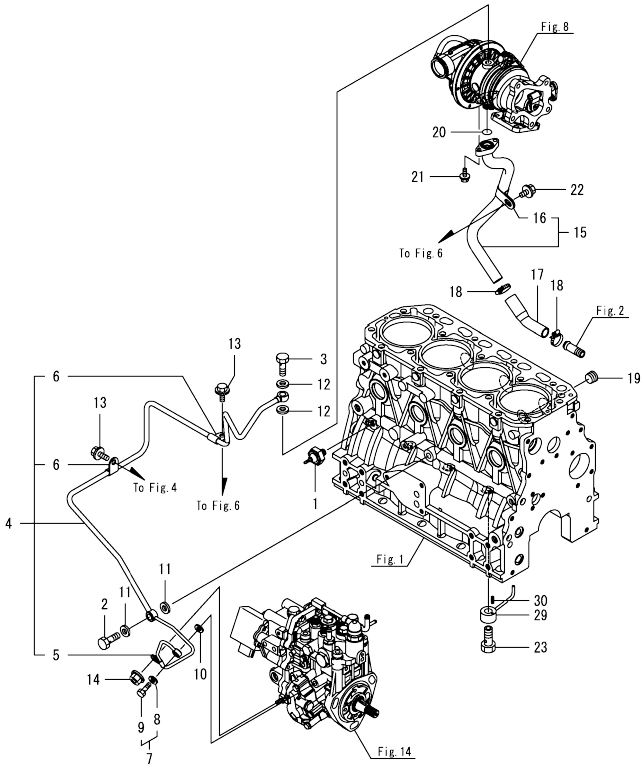


(A)=4TNV84T-ZXKAT
(B)=
(C)=

(D)=
(E)=
(F)=

No.	Lev.	Parts No.	Description	Q'ty						I	R
				(A)	(B)	(C)	(D)	(E)	(F)		
1	1	114250-39450	SWITCH, HYDRAULIC	1							
2	1	124160-39140	BOLT, PIPE JOINT M10	1							
3	1	121252-39150	BOLT, JOINT M10X1.5	1							
4	1	129558-39460	PIPE ASSY, OIL	1							
5	2	119802-39500	RETAINER, PIPE	1							
6	2	124223-39900	RETAINER	2							
7	1	129005-59830	BOLT ASSY, JOINT M8	1							
8	2	22190-080002	WASHER, SEAL 8	1							
9	2	23857-030000	BOLT, JOINT 3	1							
10	1	22190-080002	WASHER, SEAL 8	1							
11	1	22190-100002	WASHER, SEAL 10	2							
12	1	23414-100000	GASKET, 10X1.0	2							
13	1	26106-080122	BOLT, M8X 12 PLATED	2							
14	1	26366-060002	NUT, M6	1							
15	1	129558-39670	PIPE, OIL RETURN	1							
16	2	123910-39850	RETAINER	1							
17	1	129558-39800	HOSE, OIL RETURN	1							
18	1	23000-025000	CLAMP, 25	2							
19	1	23876-030000	PLUG, R03	1							
20	1	24316-000160	O-RING, 4DP16.0	1							
21	1	26106-060162	BOLT, M6X 16 PLATED	2							
22	1	26106-080122	BOLT, M8X 12 PLATED	1							
23	1	129792-39410	VALVE ASSY, CHECK	4							
29	1	129553-39650	NOZZLE, COOLING	4							
30	1	22351-030010	PIN, SPRING 3.0X10	4							

Fig.13. COOLING WATER SYSTEM

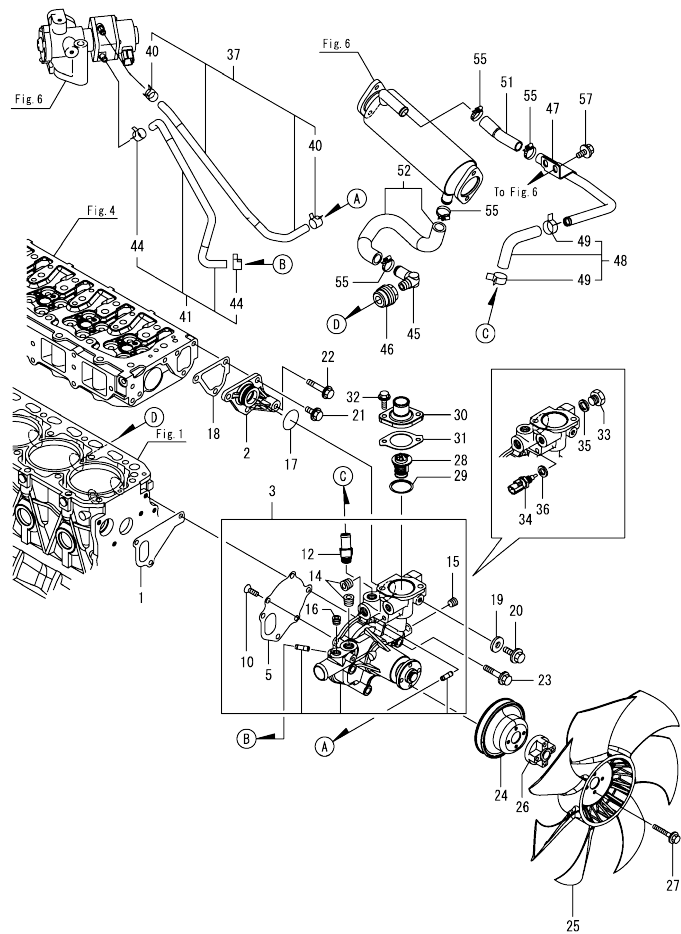


(A)=4TNV84T-ZXKAT
(B)=
(C)=

(D)=
(E)=
(F)=

No.	Lev.	Parts No.	Description	Q'ty						I	R
				(A)	(B)	(C)	(D)	(E)	(F)		
1	1	129486-42021	GASKET, WATER PUMP	1							
2	1	129004-42040	JOINT, WATER PIPE	1							
3	1	129558-42050	PUMP ASSY, WATER	1							
5	2	129100-42051	GASKET, WATER PUMP	1							
10	2	121850-42410	SCREW	3							
12	2	129558-49310	JOINT, COOLER HOSE	1							
14	2	129916-49740	PLUG, R3/8	2							
15	2	23876-010000	PLUG, R01	1							
16	2	23876-020000	PLUG, R02	1							
17	1	129486-42140	O-RING, G30	1							
18	1	124395-49840	GASKET, THERMOSTAT	1							
19	1	23414-080000	GASKET, 8X1.0	1							
20	1	26106-080122	BOLT, M8X 12 PLATED	1							
21	1	26106-080162	BOLT, M8X 16 PLATED	3							
22	1	26106-080452	BOLT, M8X 45 PLATED	1							
23	1	26106-080602	BOLT, M8X 60 PLATED	3							
24	1	129403-42380	V-PULLEY, PUMP	1							
25	1	129655-44740	FAN, COOLING D=380	1							
26	1	171353-44760	SPACER, FAN 25MM	1							
27	1	26106-060402	BOLT, M6X 40 PLATED	4							
28	1	129155-49801	THERMOSTAT, 71C	1							
29	1	129150-49811	GASKET, THERMOSTAT	1							
30	1	129350-49530	COVER, THERMOSTAT	1							
31	1	129795-49551	GASKET, COVER	1							
32	1	26106-080222	BOLT, M8X 22 PLATED	2							
33	1	121450-42450	PLUG, M16	1							
34	1	129927-44900	SENSOR, TEMPERATURE	1							
35	1	124465-44950	GASKET, 16	1							
36	1	22190-120002	WASHER, SEAL 12	1							
37	1	129558-49650	PIPE, EGR VALVE A	1							
40	2	23080-012000	CLAMP, 12	2							
41	1	129558-49660	PIPE, EGR VALVE B	1							
44	2	23080-012000	CLAMP, 12	2							
45	1	124070-13300	ELBOW, PT3/8	1							
46	1	129973-49110	JOINT, NPTF1	1							
47	1	129558-49670	HOSE ASSY,COOLER OUT	1							
48	1	129558-49690	HOSE ASSY,COOLER OUT	1							
49	2	171008-03990	CLAMP, HOSE 18.5	2							
51	1	129558-49750	HOSE, COOLER OUT A	1							
52	1	129558-49810	PIPE, EGR COOLER IN	1							
55	1	23000-022000	CLAMP, 22	4							
57	1	26106-080122	BOLT, M8X 12 PLATED	2							

Fig.14. FUEL INJECTION PUMP

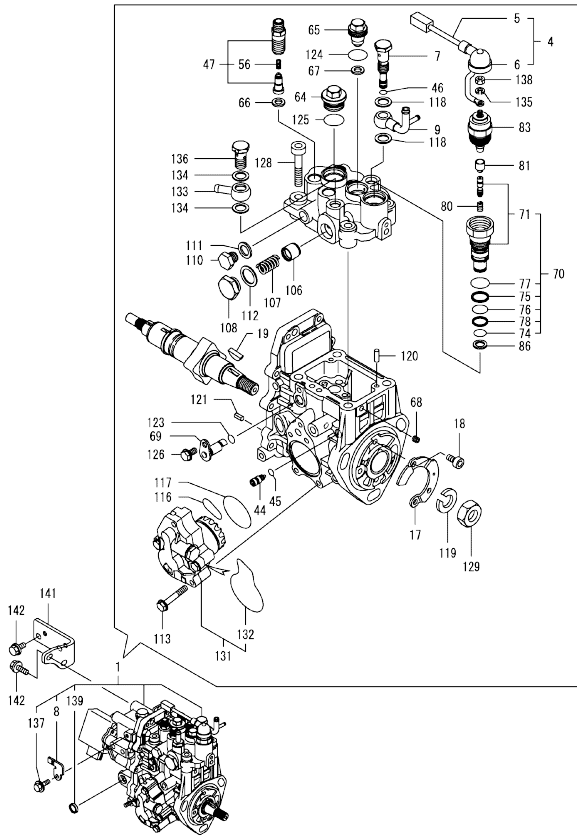

Remarks
(1)Governor(Fig.15) is incorporated in this Fuel Injection Pump(No.1).
(1)Eco pump
Make sure to update the engines ECU information when replacing the Eco pump.
Failing to do so will result in engine malfunction.


(A)=4TNV84T-ZXKAT
(B)=
(C)=

(D)=
(E)=
(F)=

No.	Lev.	Parts No.	Description	Q'ty						I	R
				(A)	(B)	(C)	(D)	(E)	(F)		
1	1	729558-51340	PUMP ASSY, INJECTION	1							1
4	2	129927-51650	HARNESS ASSY, WIRE	1							
5	3	129927-51660	HARNESS	1							
6	3	129263-77941	CAP, RUBBER	1							
7	2	158601-51650	JOINT, OVERFLOW	1							
8	2	129927-51670	BRACKET	1							
9	2	158552-51670	JOINT, OVERFLOW	1							
17	2	129008-51900	COVER, PUMP	1							
18	2	129008-51920	BOLT, M6X10	2							
19	2	119802-51090	KEY, FEATHER 4X16	1							
44	2	158600-51270	STOPPER, TAPPET	1							
45	2	158563-51281	O-RING, 4D S6	1							
46	2	158563-51281	O-RING, 4D S6	1							
47	2	129008-51390	VALVE ASSY, DELIVERY	4							
56	3	158563-51330	SPRING, DELIVERY	4							
64	2	158601-51550	PLUG, M22	1							
65	2	119802-51560	PLUG, BARREL M14	1							
66	2	158552-51571	GASKET, BARREL PLUG	4							
67	2	158552-51571	GASKET, BARREL PLUG	1							
68	2	158557-51570	PLUG, RACK	1							
69	2	158552-51580	LIFTER, LINK	1							
70	2	129657-51590	TIMER ASSY	1							
71	3	129657-51600	TIMER ASSY	1							
74	3	158553-51670	O-RING, PUMP TIMER	1							
75	3	119802-51680	RING, BACKUP	1							
76	3	119802-51690	O-RING, 1016	1							
77	3	24356-190200	O-RING, 4D19020	1							
78	3	24372-000150	RING, BACK UP T2P15	1							
80	2	119852-51630	SPRING, TIMER	1							
81	2	119852-51640	CAP, TIMER	1							
83	2	119852-51650	VALVE ASSY, SOLENOID	1							
86	2	158553-51680	GASKET, TIMER	1							
106	2	158601-51770	PISTON, ACCUMULATOR	1							
107	2	158552-51781	SPRING, ACCUMULATOR	1							
108	2	158601-51790	PLUG, ACCUMULATOR	1							
110	2	158553-51930	PLUG, M12	1							
111	2	22190-120002	WASHER, SEAL 12	1							
112	2	22190-180002	WASHER, SEAL 18	1							
113	2	158553-51770	BOLT	4							
116	2	158552-52311	O-RING, FEED PUMP	1							
117	2	158552-52400	O-RING, 4E S42	1							
118	2	22190-120002	WASHER, SEAL 12	2							
119	2	22217-140000	WASHER, SPRING 14	1							
120	2	22312-050140	PIN, PARALLEL 5X14	2							
121	2	22351-050010	PIN, SPRING 5.0X10	2							
123	2	24311-000070	O-RING, 1AP7.0	1							
124	2	24356-190180	O-RING, 4D19018	1							
125	2	24356-190200	O-RING, 4D19020	1							
126	2	26106-060102	BOLT, M6X 10 PLATED	1							
128	2	26450-080452	BOLT, M8X 45	4							
129	2	26776-140002	NUT, LOCK M14	1							

N:Old $\frac{New}{Old}$ New, Q:Old $\frac{New}{Old}$ New, R:Old $\frac{New}{Old}$ New, S:Old $\frac{New}{Old}$ New, W:Add, Z:Discontinued, F:Interchangeable by set, K:Q'ty Change
++ CONTINUE ++ Copyright (C) 2019 YANMAR GLOBAL CS CO., LTD. All Rights Reserved.

Fig.14. FUEL INJECTION PUMP

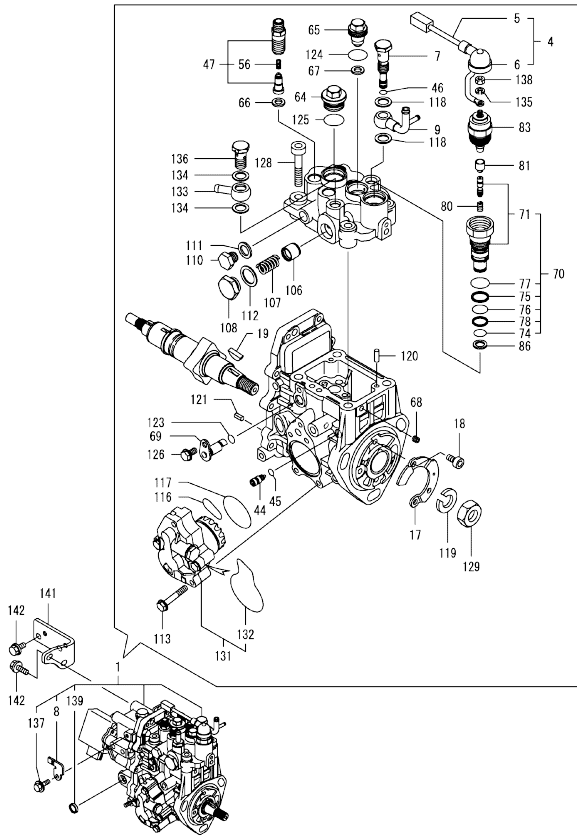


Remarks
(1)Governor(Fig.15) is incorporated in this Fuel Injection Pump(No.1).
(1)Eco pump
Make sure to update the engines ECU information when replacing the Eco pump.
Failing to do so will result in engine malfunction.

(A)=4TNV84T-ZXKAT
(B)=
(C)=

(D)=
(E)=
(F)=

No.	Lev.	Parts No.	Description	Q'ty						I	R
				(A)	(B)	(C)	(D)	(E)	(F)		
131	2	158552-52100	PUMP ASSY, FUEL FEED	1							
132	3	158552-52500	O-RING, PUMP INNER	1							
133	2	129916-59020	JOINT, PIPE 12	1							
134	2	22190-120002	WASHER, SEAL 12	2							
135	2	22217-050000	WASHER, SPRING 5	1							
136	2	23857-060000	BOLT, JOINT 6	1							
137	2	26106-060122	BOLT, M6X 12 PLATED	1							
138	2	26716-050002	NUT, M5	1							
139	2	27241-160000	PLUG, 16	1							
141	1	129263-51251	RETAINER, FUEL PUMP	1							
142	1	26106-080162	BOLT, M8X 16 PLATED	4							

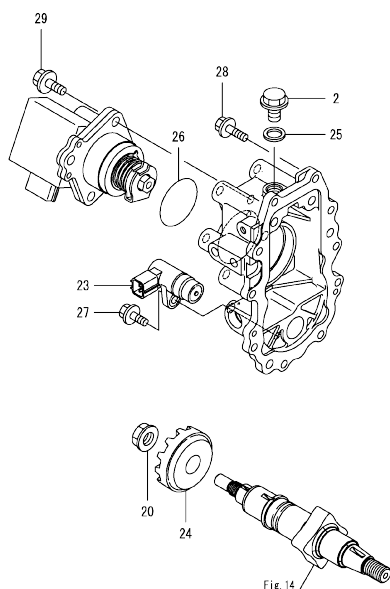


No.	Lev.	Parts No.	Description	Q'ty					
				(A)	(B)	(C)	(D)	(E)	(F)
2	2	158553-51930	PLUG, M12	1					
20	2	129008-61301	NUT, SUPPORT	1					
23	2	158557-61720	SENSOR, ROTATION	1					
24	2	158553-61780	GEAR, SENSOR	1					
25	2	22190-120002	WASHER, SEAL 12	1					
26	2	24341-000480	O-RING, 1AS48.0	1					
27	2	26106-060162	BOLT, M6X 16 PLATED	1					
28	2	26106-060202	BOLT, M6X 20 PLATED	10					
29	2	26106-080252	BOLT, M8X 25 PLATED	3					

Remarks

* This figure(Governor) is incorporated in the Fuel Injection Pump(Fig.14).

N:Old ^{Yes}/_{No} New. Q:Old ^{No}/_{Yes} New. R:Old ^{Yes}/_{Yes} New. S:Old ^{No}/_{No} New. W:Add. Z:Discontinued. F:Interchangeable by set. K:Qty Change

Fig.16. FUEL INJECTION VALVE

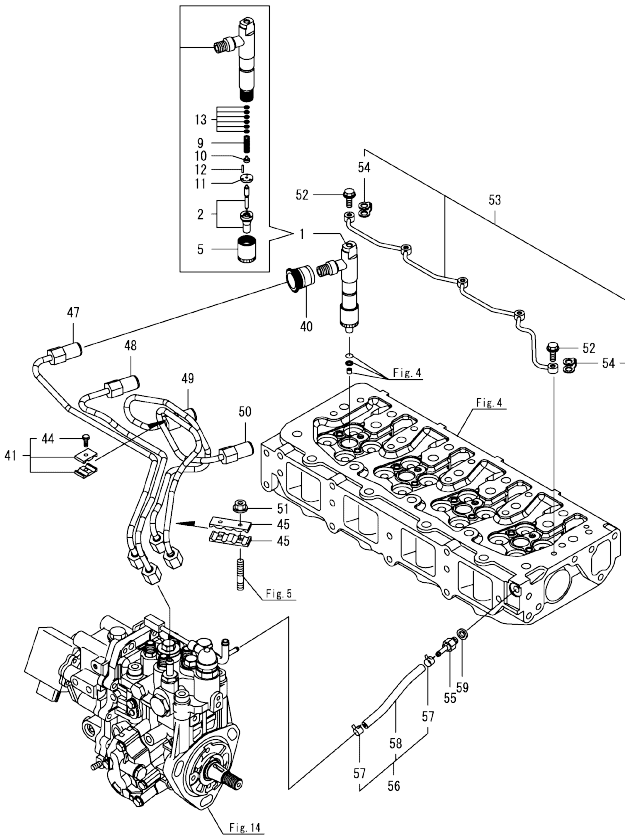


(A)=4TNV84T-ZXKAT
(B)=
(C)=

(D)=
(E)=
(F)=

No.	Lev.	Parts No.	Description	Q'ty						I	R
				(A)	(B)	(C)	(D)	(E)	(F)		
1	1	729530-53200	VALVE ASSY,INJECTION	4							
2	2	129530-53000	VALVE ASSY,INJECTION	4							
5	2	114250-53080	NUT, NOZZLE	4							
9	2	114250-53120	SPRING, NOZZLE	4							
10	2	114250-53130	SEAT, SPRING	4							
11	2	114250-53140	SPACER, VALVE STOP	4							
12	2	114250-53210	PIN, POSITIONING	8							
13	2	119803-53400	SHIM SET	4							1
40	1	123907-11601	SEAL, PIPE	4							
41	1	119305-59120	RETAINER, PIPE	1							
44	2	129150-59131	BOLT, M4X14	1							
45	1	123472-59120	RETAINER, PIPE	2							
47	1	129558-59810	PIPE ASSY, INJECTION	1							
48	1	129558-59820	PIPE ASSY, INJECTION	1							
49	1	129558-59831	PIPE ASSY, INJECTION	1							
50	1	129558-59841	PIPE ASSY, INJECTION	1							
51	1	26366-060002	NUT, M6	2							
52	1	123907-59540	BOLT, PIPE JOINT M6	5							
53	1	129508-59550	PIPE ASSY, RETURN	1							
54	2	123907-59550	GASKET, FUEL RETURN	5							
55	1	123907-59560	JOINT, HOSE	1							
56	1	129508-59570	HOSE ASSY, RETURN	1							
57	2	124722-59050	CLAMP, HOSE 9	2							
58	2	129508-59510	HOSE, FUEL	1							
59	1	22190-080002	WASHER, SEAL 8	1							

Remarks
(1)Spare parts.

Fig.17. ELECTRONIC CONTROL UNIT(ECU)

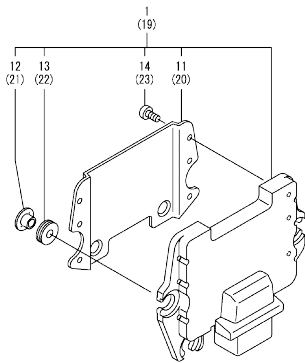


Remarks
(1)Eco ECU
This part cannot be ordered.
Replace the part using a Service ECU with the proper engine information installed.
(2)Service ECU
When replacing this part, it is necessary to update the software of the ECU using the designated service tool.
Please refer to the Service Manual for details.

(A)=4TNV84T-ZXKAT
(B)=
(C)=

(D)=
(E)=
(F)=

No.	Lev.	Parts No.	Description	Q'ty						I	R
				(A)	(B)	(C)	(D)	(E)	(F)		
1	1	129558-75080	ECU ASSY,4-84T-ZXKAT	1							1
11	2	129927-77600	SHIELD, ECU	1							
12	2	129927-77680	COLLAR, CONTROLLER	3							
13	2	119578-91351	RUBBER, CONTROLLER	3							
14	2	22877-500080	SCREW, 5X 8	6							
19	1	129927-75901	ECU ASSY, SERVICE	1							2
20	2	129927-77600	SHIELD, ECU	1							
21	2	129927-77680	COLLAR, CONTROLLER	3							
22	2	119578-91351	RUBBER, CONTROLLER	3							
23	2	22877-500080	SCREW, 5X 8	6							

Fig.18. STARTER MOTOR

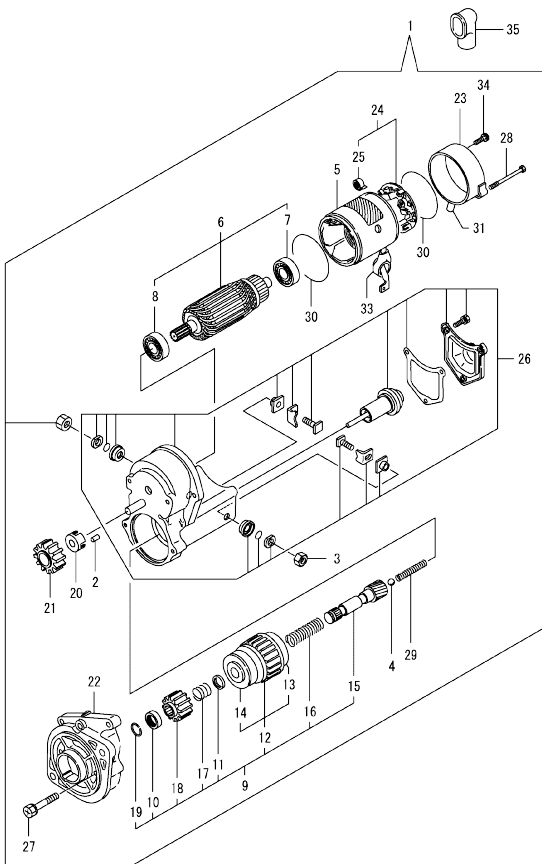


Remarks
* Loose parts.

(A)=4TNV84T-ZXKAT
(B)=
(C)=

(D)=
(E)=
(F)=

No.	Lev.	Parts No.	Description	Q'ty						I	R
				(A)	(B)	(C)	(D)	(E)	(F)		
1	1	129407-77010	STARTER, RA1.4	1							
2	2	X0283060061	ROLLER	5							
3	2	X9490561370	NUT	1							
4	2	X9491200240	BALL, STEEL	1							
5	2	129407-77210	YOKE ASSY	1							
6	2	129407-77220	ARMATURE ASSY	1							
7	3	129129-77230	BEARING, BALL	1							
8	3	129129-77240	BEARING, BALL	1							
9	2	129407-77250	STARTER	1							
10	3	X0280210230	NUT, PINION STOP	1							
11	3	X0283270140	RETAINER, SNAP	1							
12	3	129407-77390	CLUTCH ASSY, STARTER	1							
13	4	129129-77440	BEARING, BALL	1							
14	4	129129-77450	BEARING, BALL	1							
15	3	129129-77400	SHAFT, STARTER	1							
16	3	129129-77410	SPRING, COIL	1							
17	3	129407-77410	SPRING, COIL	1							
18	3	129129-77420	PINION, STARTER	1							
19	3	129129-77430	RING, SNAP	1							
20	2	129129-77260	RETAINER	1							
21	2	129129-77270	PINION	1							
22	2	129407-77280	HOUSING, STARTOR	1							
23	2	129129-77290	FRAME, STARTER END	1							
24	2	129407-77300	HOLDER ASSY	1							
25	3	X9491730461	SPRING, BRUSH	4							
26	2	129407-77310	SWITCH ASSY, MAGNET	1							
27	2	129129-77320	BOLT, W/WASHER	2							
28	2	129407-77330	BOLT	2							
29	2	129129-77340	SPRING	1							
30	2	129129-77350	O-RING	2							
31	2	129129-77362	COVER	1							
33	2	129129-77380	CAP	1							
34	2	129129-77460	SCREW	2							
35	1	124550-77030	COVER, TERMINAL B	1							

Fig.19. ACCESSORY

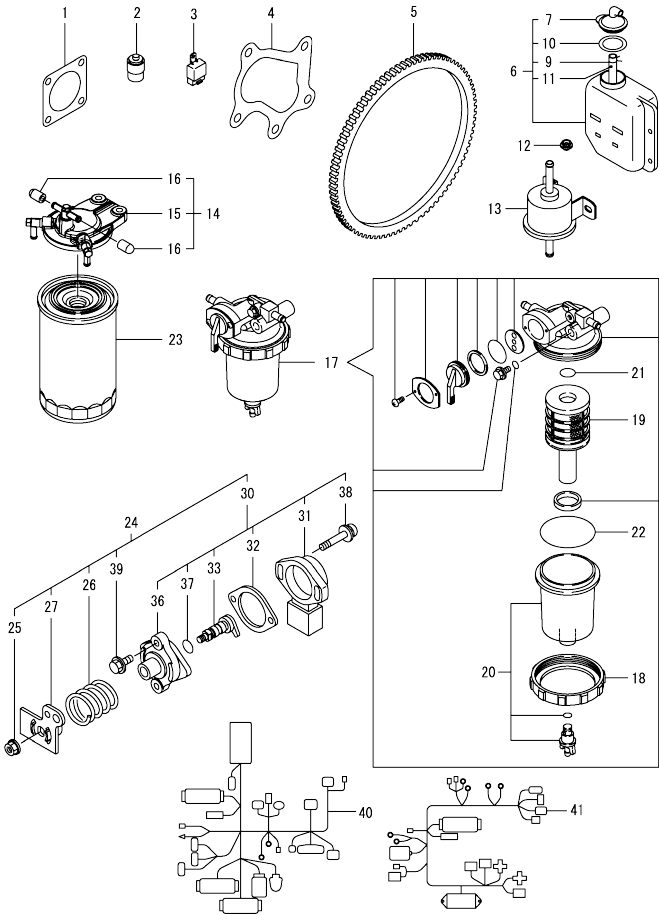

(A)=4TNV84T-ZXKAT
(B)=
(C)=

(D)=
(E)=
(F)=

No.	Lev.	Parts No.	Description	Q'ty						I	R
				(A)	(B)	(C)	(D)	(E)	(F)		
1	1	129150-01881	GASKET, PUMP COVER	1							
2	1	126650-12680	INDICATOR	1							
3	1	172B02-17150	RELAY, CA TYPE C	2							
4	1	129508-18090	GASKET, TURBINE OUT	1							
5	1	124550-21600	GEAR, RING Z=127	1							
6	1	121468-44520	TANK ASSY, SUB	1							
7	2	121450-44531	CAP	1							
9	2	124450-44560	CLAMP, PIPE	1							
10	2	121470-44581	GASKET	1							
11	2	23065-070130	PIPE, 7X 130	1							
12	1	119255-44660	RUBBER, RADIATOR	2							
13	1	119225-52102	PUMP, FUEL FEED	1							
14	1	129973-55610	BRACKET ASSY, FILTER	1							
15	2	119934-55611	BRACKET, FILTER	1							
16	2	129461-59580	CAP, FUEL	2							
17	1	119802-55700	SEPARATOR ASSY, WATER	1							
18	2	129100-55690	NUT, RETAINING	1							
19	2	119802-55710	ELEMENT, FUEL	1							
20	2	119802-55730	CUP ASSY, SEPARATOR	1							
21	2	24311-000160	O-RING, 1AP16.0	1							
22	2	24321-000650	O-RING, 1AG65.0	1							
23	1	129907-55801	FILTER, FUEL	1							
24	1	129A22-77800	SENSOR ASSY, ACCEL	1							
25	2	194990-22130	NUT, M6	1							
26	2	119060-61990	SPRING, RETURN	1							
27	2	129A22-77820	LEVER ASSY, ACCEL	1							
30	2	129A22-77890	SENSOR ASSY, ACCEL	1							
31	3	185100-50070	SENSOR, ACCELERATOR	1							
32	3	129054-77820	GASKET, SUPPORT	1							
33	3	129054-77830	SHAFT ASSY, SENSOR	1							
36	3	129A22-77880	SUPPORT	1							
37	3	24311-000070	O-RING, 1AP7.0	1							
38	3	26023-040202	SCREW, M4X20	2							
39	2	26106-060122	BOLT, M6X 12 PLATED	2							
40	1	129927-91040	HARNESS, WIRE	1							
41	1	129927-91050	HARNESS, ECU-POWER	1							

Parts No. Index

Parts No.	Fig. No.	Ref. No.
105425-01690	3	3
114250-39450	12	1
114250-53080	16	5
114250-53120	16	9
114250-53130	16	10
114250-53140	16	11
114250-53210	16	12
119005-35151	11	48
119060-61990	19	26
119100-11330	4	58
119225-52102	19	13
119255-44660	19	12
119305-59120	16	41
119309-01810	1	28
119578-91351	17	13
	22	
119609-32040	2	10
119625-11880	4	39
119717-11190	4	30
119717-11340	4	31
119717-11350	4	32
119717-11800	4	74
119802-01561	2	5
119802-03070	4	49
119802-11870	4	38
119802-13651	6	6
119802-13661	6	7
119802-13791	6	12
119802-25071	7	28
119802-25101	7	10
119802-25901	7	15
119802-39500	12	5
119802-51090	14	19
119802-51560	14	65
119802-51680	14	75
119802-51690	14	76
119802-55700	19	17
119802-55710	19	19
119802-55730	19	20
119803-21200	9	4
119803-25050	7	9
119803-53400	16	13
119852-51630	14	80
119852-51640	14	81
119852-51650	14	83
119934-01800	2	3
119934-55611	19	15
119940-59130	11	44
121023-01551	2	25
121252-39150	12	3

Parts No.	Fig. No.	Ref. No.
121450-42450	13	33
121450-44531	19	7
121468-44520	19	6
121470-44581	19	10
121520-34810	11	17
121550-23200	9	25
121850-21290	9	5
	10	4
121850-21680	9	12
121850-42410	13	10
121850-51960	2	12
123472-59120	16	45
123907-03100	4	52
123907-03110	4	53
123907-03140	4	55
123907-11550	4	17
123907-11601	16	40
123907-11830	4	36
123907-59540	16	52
123907-59550	16	54
123907-59560	16	55
123910-39850	12	16
124060-01050	1	11
124070-13300	13	45
124085-35350	11	35
124160-01751	2	7
	4	46
124160-01910	1	12
124160-11360	4	66
124160-39140	12	2
124223-39900	12	6
124240-01871	2	8
	22	
	7	16
124395-49840	13	18
124450-44560	19	9
124465-44950	13	35
124550-21600	19	5
124550-77030	18	35
124722-59050	16	57
126650-12680	19	2
128170-14150	10	3
129001-01250	1	4
129001-02931	1	30
129004-42040	13	2
129005-59830	12	7
129006-35100	11	29
129006-44480	11	36
129008-51390	14	47
129008-51900	14	17

Parts No.	Fig. No.	Ref. No.
129008-51920	14	18
129008-61301	15	20
129009-01530	2	4
129009-11340	4	59
129054-77820	19	32
129054-77830	19	33
129100-01580	1	29
	3	11
	9	2
129100-23910	9	28
129100-42051	13	5
129100-55690	19	18
129100-77501	5	15
129100-77510	5	16
129103-49301	11	46
129122-44480	2	11
129129-77230	18	7
129129-77240	18	8
129129-77260	18	20
129129-77270	18	21
129129-77290	18	23
129129-77320	18	27
129129-77340	18	29
129129-77350	18	30
129129-77362	18	31
129129-77380	18	33
129129-77400	18	15
129129-77410	18	16
129129-77420	18	18
129129-77430	18	19
129129-77440	18	13
129129-77450	18	14
129129-77460	18	34
129150-01200	1	26
129150-01580	2	6
129150-01881	7	17
	19	1
129150-02020	1	6
129150-02450	7	4
129150-02871	1	33
129150-02931	1	23
129150-02941	1	36
129150-03070	4	50
129150-11230	4	8
	12	
129150-11750	4	10
	14	
	35	
129150-14101	7	6
129150-14200	7	1

Parts No.	Fig. No.	Ref. No.
129150-14400	7	2
129150-23601	9	26
129150-23611	9	29
129150-25301	7	14
129150-26050	7	20
129150-32020	11	13
129150-35042	11	18
129150-35111	11	33
129150-49811	13	29
129150-59131	16	44
129150-77511	5	17
129155-49801	13	28
129202-22300	9	19
129263-51251	14	141
129263-77941	14	6
129350-49530	13	30
129400-28121	9	6
129400-28150	10	8
129403-42380	13	24
129407-77010	18	1
129407-77210	18	5
129407-77220	18	6
129407-77250	18	9
129407-77280	18	22
129407-77300	18	24
129407-77310	18	26
129407-77330	18	28
129407-77390	18	12
129407-77410	18	17
129417-35150	11	31
129418-18320	6	4
		5
	8	3
129418-32001	11	1
129457-28000	10	2
129457-28011	10	5
129457-34800	11	16
129461-59580	19	16
129486-01670	3	15
129486-42021	13	1
129486-42140	13	17
129508-01330	1	27
129508-03010	4	48
129508-11100	4	26
129508-11110	4	27
129508-11130	4	28
129508-11180	4	29
129508-11241	4	1
129508-11250	4	2
129508-11260	4	4

Parts No. Index

Parts No.	Fig. No.	Ref. No.
129508-11270	4	5
129508-11280	4	6
129508-11310	4	57
129508-11650	4	7
129508-11660	4	11
129508-11820	4	37
129508-11900	4	40
129508-11920	4	15
129508-12110	5	2
129508-14580	7	3
129508-18011	8	1
129508-18080	8	2
129508-18090	19	4
129508-33031	11	26
129508-33060	11	27
129508-35100	11	28
129508-35150	11	32
129508-49030	11	37
129508-49040	11	41
129508-59510	16	58
129508-59550	16	53
129508-59570	16	56
129509-11700	4	18
129509-13400	6	8
129509-13700	5	5
129509-13710	5	6
129509-13720	5	7
129509-22080	9	13
129509-22500	9	15
129509-22900	9	31
129509-22950	9	33
129509-79700	4	60
129530-11360	4	47
129530-53000	16	2
129550-01702	3	1
129550-13110	6	1
129550-35090	11	19
129553-39650	12	29
129555-01750	3	6
129555-26000	7	19
129558-12070	5	1
129558-12110	5	4
129558-12160	5	3
129558-13110	6	3
129558-13160	6	2
129558-13410	6	9
129558-13840	6	15
129558-21000	9	1
129558-39460	12	4
129558-39670	12	15

Parts No.	Fig. No.	Ref. No.
129558-39800	12	17
129558-42050	13	3
129558-49310	13	12
129558-49650	13	37
129558-49660	13	41
129558-49670	13	47
129558-49690	13	48
129558-49750	13	51
129558-49810	13	52
129558-59810	16	47
129558-59820	16	48
129558-59831	16	49
129558-59841	16	50
129558-75080	17	1
129623-21650	9	10
129633-03000	4	71
129648-01600	3	12
129648-01780	3	14
129655-44740	13	25
129657-51590	14	70
129657-51600	14	71
129672-11510	4	33
129792-39410	12	23
129795-01950	2	9
129795-01960	10	1
129795-02412	1	9
129795-21661	9	11
129795-49551	13	31
129900-07900	4	69
129907-03070	4	51
129907-11950	4	41
129907-55801	19	23
129916-49740	13	14
129916-59020	14	133
129922-03120	4	54
129927-13810	6	14
129927-13910	6	22
129927-13920	6	23
129927-44900	13	34
129927-51650	14	4
129927-51660	14	5
129927-51670	14	8
129927-75901	17	19
129927-77600	17	11
		20
129927-77680	17	12
		21
129927-91040	19	40
129927-91050	19	41
129928-13410	6	10

Parts No.	Fig. No.	Ref. No.
129928-13410	6	11
129928-13800	6	13
129928-13900	6	21
129960-03990	4	73
129973-49110	13	46
129973-55610	19	14
129A22-77800	19	24
129A22-77820	19	27
129A22-77880	19	36
129A22-77890	19	30
129C26-01890	2	23
	7	18
158552-51151	7	29
158552-51571	14	66
		67
158552-51580	14	69
158552-51670	14	9
158552-51781	14	107
158552-52100	14	131
158552-52311	14	116
158552-52400	14	117
158552-52500	14	132
158553-51670	14	74
158553-51680	14	86
158553-51770	14	113
158553-51930	14	110
	15	2
158553-61780	15	24
158557-51570	14	68
158557-61720	15	23
158563-51281	14	45
		46
158563-51330	14	56
158600-51270	14	44
158601-51550	14	64
158601-51650	14	7
158601-51770	14	106
158601-51790	14	108
171008-03990	11	38
		42
	13	49
171051-01921	1	5
171056-49120	11	15
171340-77520	5	18
171353-44760	13	26
172B02-17150	19	3
185100-50070	19	31
194990-22130	19	25
22190-080002	2	13
		14

Parts No.	Fig. No.	Ref. No.
22190-080002	12	8
		10
	16	59
22190-100002	12	11
22190-120002	13	36
	14	111
		118
		134
	15	25
22190-160002	3	5
22190-180002	14	112
22217-050000	14	135
22252-000260	9	20
22312-050140	14	120
22351-030010	12	30
22351-050010	14	121
22351-060012	4	42
22512-070140	7	7
	9	7
		9
22857-500100	4	61
		62
		63
22857-500160	5	8
22877-500080	17	14
		23
23000-022000	13	55
23000-025000	12	18
23000-054000	5	11
23000-070000	5	12
23065-070130	19	11
23080-012000	13	40
		44
23080-015000	11	40
		45
23414-080000	13	19
23414-100000	12	12
23857-030000	12	9
23857-060000	14	136
23876-005000	10	19
23876-010000	13	15
23876-020000	4	24
	13	16
23876-030000	12	19
24105-060064	7	25
24311-000070	14	123
	19	37
24311-000120	4	43
		67

Parts No. Index

Parts No.	Fig. No.	Ref. No.
24311-000140	10	21
24311-000160	19	21
24311-000320	2	15
	4	68
24316-000160	12	20
24321-000650	19	22
24341-000240	2	26
24341-000480	15	26
24356-190180	14	124
24356-190200	14	77
		125
24372-000150	14	78
26023-040202	19	38
26106-060102	14	126
26106-060122	4	64
	14	137
	19	39
26106-060162	2	27
	12	21
	15	27
26106-060202	15	28
26106-060402	13	27
26106-080122	2	24
	3	7
	11	24
	12	13
		22
	13	20
		57
26106-080142	7	8
	10	20
26106-080162	2	16
		17
	4	70
	6	17
	13	21
	14	142
26106-080202	5	9
		13
	6	18
	11	47
26106-080222	13	32
26106-080252	4	44
	15	29
26106-080302	2	18
	7	26
26106-080352	11	25
26106-080402	5	19
	7	13
26106-080452	13	22

Parts No.	Fig. No.	Ref. No.
26106-080502	3	8
	4	45
26106-080552	2	19
26106-080602	10	22
	13	23
26106-080702	5	14
26106-080802	5	20
	10	23
26106-080852	2	20
26106-081002	3	9
26106-081202	3	10
26106-100302	6	19
26106-100402	6	24
26106-101052	6	25
26216-060252	5	10
26226-080352	4	16
26306-080002	2	21
	6	20
	7	27
	8	4
26366-060002	12	14
	16	51
26450-060252	11	14
26450-080452	14	128
26716-050002	14	138
26776-140002	14	129
27241-120000	1	13
27241-160000	14	139
27241-180000	4	65
27241-300000	1	10
27241-400000	4	25
729008-01500	2	1
729402-23100	9	21
729429-01721	3	2
729490-28510	10	9
729490-28520	10	14
729508-01570	1	1
729530-53200	16	1
729558-51340	14	1
X0280210230	18	10
X0283060061	18	2
X0283270140	18	11
X9490561370	18	3
X9491200240	18	4
X9491730461	18	25

Parts No.	Fig. No.	Ref. No.