

0CW10-M76600EN

P R E F A C E

1. This parts catalog is the 1st edition of 3TNV88-BDTE for Terberg.

Pub.No. : 0CW10-G76600

Published : October, 2012

2. Model name

Engine model	Vehicle	Vehicle made by
3TNV88-BDTE	FORKLIFT	Terberg

Directions for the Parts Catalog.

1. This Parts Catalog shows both standard and optional parts.
2. Parts may change without prior notice.
3. The following is an example of the Parts Catalog format.

OCF10-G21601 29. FUEL INJECTION PUMP(W/BOOST)										
REF.	LEV.	PARTS NO.	DESCRIPTION	(A)	(B)	(C)	(D)	(E)	(F)	
1	1	729595-51390	FUEL INJECTION PUMP	1	1	1	1	1		1
1-1	1	729595-51391	FUEL INJECTION PUMP	1	1	1	1	1	N	1
		(A=E00185) (B=E00200)								
3	2	26022-060162	SCREW M 6X 16	9	9	9	9	9		
3-1	2	26022-060162	SCREW M 6X 16	4	4	4	4	4	K	
		(A=E00156) (B=E00156) (C=E00156) (D=E00156) (E=E00156)								
4	2	129470-51040	CAMSHAFT	1	1	1	1	1		
5	2	122710-51050	BEARING, ROLLER	2	2	2	2	2		
6	2	129470-51060	RETAINER	1	1	1	1	1		

Remarks

(1) BOOST COMPENSATOR TYPE. OPTIONAL PART, TO E00155, (4JH-DT, 4JH-DTZ)

① Ref. No.

The Ref. No. listed may not be in accordance with the illustration Ref. No.

(Ex.) Illustration No.

List Ref No.

1 1 (Before change) → 1-1 (After change)

For interchangeable symbols N, R and K, illustrations for new parts may be abbreviated.

② Lev. (Level)

Level indication

The numbers below indicate the level of relativity towards the main part.

1 ---- Main parts (Assembly parts)

2 ---- Sub component included in " 1 ".

3 ---- Sub component included in " 2 ".

Note) Parts that are not for sale are partially illustrated but not listed.

③ Interchangeability Symbol

When a part change takes place, one of the following interchangeability symbols is indicated beside the part.

Symbol	Interchangeability	Contents note
N	Old $\xrightarrow{\text{Yes}}$ New No	New Part is interchangeable for Old Part but Old Part is not interchangeable for New Part.
Q	Old $\xrightarrow{\text{No}}$ New Yes	New Part is not interchangeable for Old Part but Old Part is interchangeable for New Part.
R	Old $\xrightarrow{\text{Yes}}$ New Yes	New/ Old Parts are both interchangeable.
S	Old $\xrightarrow{\text{No}}$ New No	New/ Old Parts are both not interchangeable.
W		Part newly added.
Z		Part discontinued.
F		Not interchangeable by a single part but interchangeable together with related parts.
K		Changes only for used parts quantities.

④ Effective Machine No.

When a part changes, the effective Machine No. will be indicated in the (A)-(F) column.

Product Symbol	Product No.	Product Symbol	Product No.
C	Clutch No. Compressor No.	F	Machine No. (Agricultural Equip.)
D	Drive No.	M	Machine No.
E	Engine No.		

Note 1) A date may follow the symbol. (Ex.) 1996.01

Note 2) "XXXXX" and "ZZZZZ" are for parts that could not be predicted or for engine models that could not be identified.

Note 3) (A=E00185) is the E (Engine Serial Number) for the column (A) model (in this case 4JH-DT) after the parts design change.

⑤ Remarks

Figures or alphabets (symbols) are entered in the remarks column.


The comments (remarks) on parts that are indicated at the bottom of the illustration are the same symbols as those stated above.

Contents

Fig. No.	Fig. Name	Fig. No.	Fig. Name
3TNV88-BDTE			
1.	CYLINDER BLOCK		
2.	GEAR HOUSING		
3.	FLYWHEEL HOUSING & OIL SUMP		
4.	CYLINDER HEAD & BONNET		
5.	SUCTION MANIFOLD & AIR CLEANER		
6.	EXHAUST MANIFOLD		
7.	CAMSHAFT & DRIVING GEAR		
8.	CRANKSHAFT & PISTON		
9.	LUB.OIL SYSTEM		
10.	COOLING WATER SYSTEM		
11.	FUEL INJECTION PUMP		
12.	GOVERNOR		
13.	FUEL INJECTION VALVE		
14.	FUEL LINE		
15.	STARTING MOTOR		
16.	GENERATOR		
17.	GASKET SET		

0CW10-M76600

Fig.1. CYLINDER BLOCK

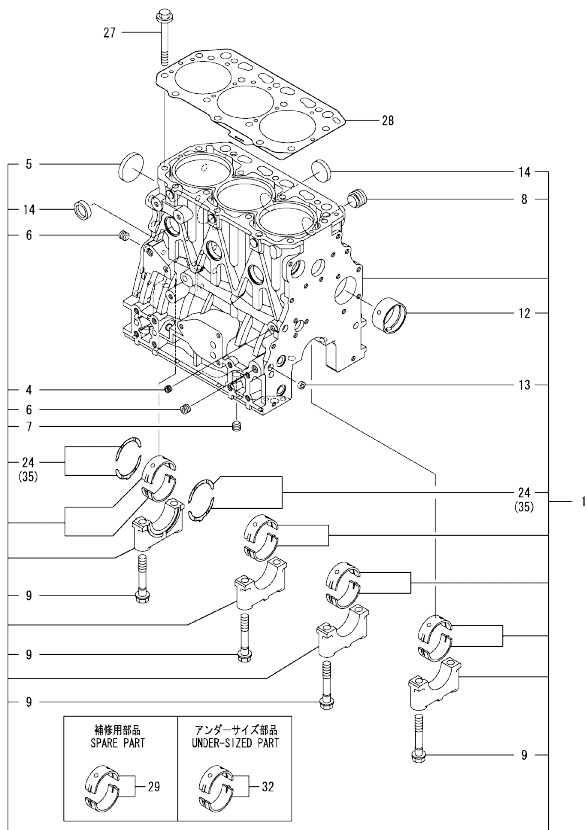


Remarks
(1)Spare part.
(2)Under-sized(U.S.=0.25)part.
(3)Over-sized(O.S.=0.25)part.

No.	Lev.	Parts No.	Description	Q'ty						I	R
				(A)	(B)	(C)	(D)	(E)	(F)		
1	1	729005-01560	BLOCK ASSY, CYLINDER	1							
4	2	124060-01050	PLUG, PT1/8	1							
5	2	129001-01250	PLUG, 50	1							
6	2	124160-01910	PLUG, PT1/4	2							
7	2	124160-01910	PLUG, PT1/4	1							
8	2	171051-01921	PLUG, NPTF1	1							
9	2	129150-02020	BOLT, METAL CAP	8							
12	2	129795-02412	BUSH, CAMSHAFT	1							
13	2	27241-120000	PLUG, 12	2							
14	2	27241-300000	PLUG 30	6							
24	2	129150-02931	BEARING, THRUST	2							
27	1	129150-01200	BOLT, HEAD	14							
28	1	129001-01340	GASKET, HEAD	1							
29	1	129001-02931	BEARING, MAIN	4							1
32	1	129150-02871	BEARING, 0.25 US	4							2
35	1	129150-02941	BEARING, THRUST 0.25	1							3

0CW10-M76600

Fig.2. GEAR HOUSING

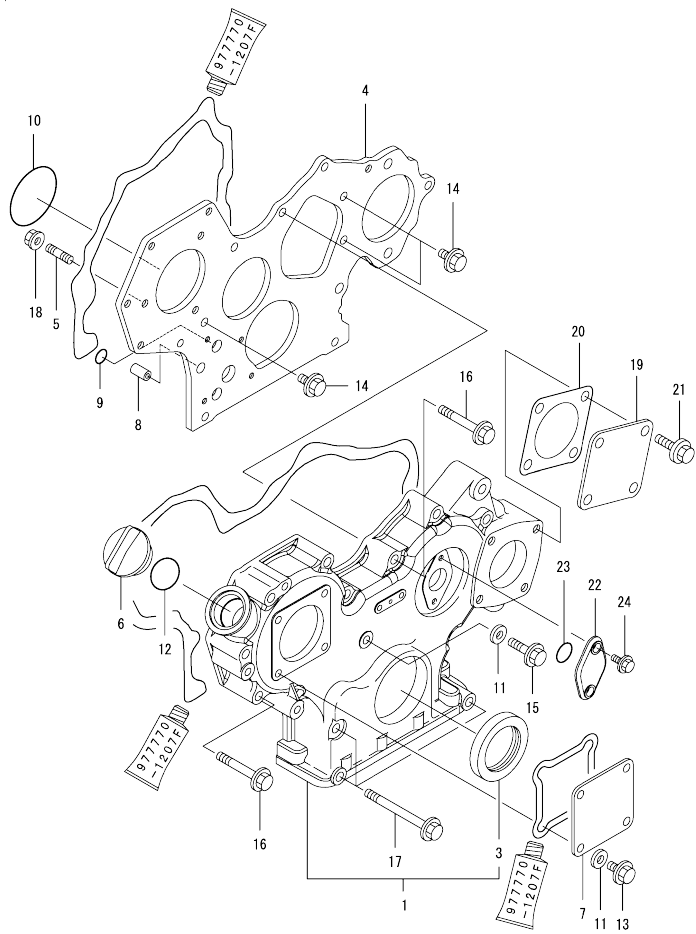


No.	Lev.	Parts No.	Description	Q'ty						I	R
				(A)	(B)	(C)	(D)	(E)	(F)		
1	1	729652-01500	CASE ASSY, GEAR	1							
3	2	119934-01800	SEAL, OIL	1							
4	1	129604-01520	FLANGE, GEAR CASE	1							
5	1	119802-01561	STUD, M8X25	3							
6	1	124160-01751	COVER, FILLER	1							
7	1	124240-01871	COVER	1							
8	1	129795-01950	PIPE, KNOCK L=18	2							
9	1	119609-32040	O-RING, P16	2							
10	1	121850-51960	O-RING	1							
11	1	22190-080002	WASHER, SEAL 6	5							
12	1	24311-000320	O-RING, 1AP32.0	1							
13	1	26106-080162	BOLT, M8X 16 PLATED	4							
14	1	26106-080162	BOLT, M8X 16 PLATED	3							
15	1	26106-080302	BOLT, M8X 30 PLATED	1							
16	1	26106-080552	BOLT, M8X 55 PLATED	10							
17	1	26106-080852	BOLT, M8X 85 PLATED	3							
18	1	26306-080002	NUT, M8	3							
19	1	124240-01871	COVER	1							
20	1	129C26-01890	GASKET, HO-P	1							
21	1	26106-080162	BOLT, M8X 16 PLATED	4							
22	1	121023-01551	COVER	1							
23	1	24341-000240	O-RING, 1AS24.0	1							
24	1	26106-060162	BOLT, M6X 16 PLATED	2							

N:Old $\frac{YES}{NO}$ New, Q:Old $\frac{YES}{NO}$ New, R:Old $\frac{YES}{NO}$ New, S:Old $\frac{YES}{NO}$ New, W:Add, Z:Discontinued, F:Interchangeable by set, K:Q'ty Change
Copyright (C) YANMAR CO., LTD. All Rights Reserved.

0CW10-M76600

Fig.3. FLYWHEEL HOUSING & OIL SUMP

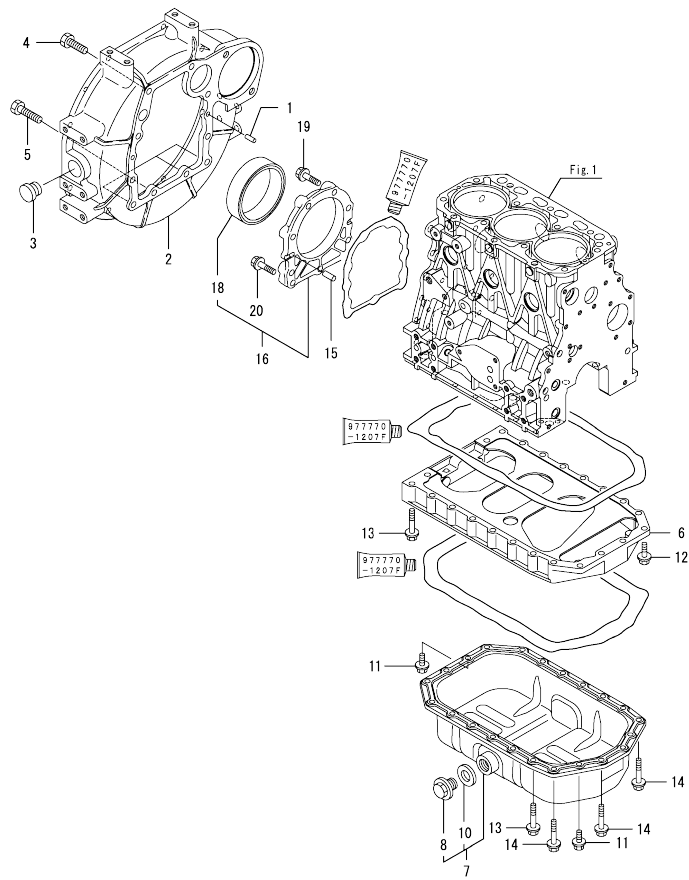


No.	Lev.	Parts No.	Description	Q'ty						I	R
				(A)	(B)	(C)	(D)	(E)	(F)		
1	1	129100-01580	PIN, M8X16	2							
2	1	129612-01600	HOUSING, FLYWHEEL	1							
3	1	119620-01750	CAP	1							
4	1	26206-100252	BOLT, M10X 25 PLATED	6							
5	1	26206-100302	BOLT, M10X 30 PLATED	4							
6	1	129100-01730	SPACER, OIL SUMP	1							
7	1	129175-01770	SUMP ASSY, OIL	1							
8	2	119640-01640	PLUG, DRAIN M22	1							
10	2	22190-220002	WASHER, SEAL 22	1							
11	1	26106-080162	BOLT, M8X 16 PLATED	4							
12	1	26106-080252	BOLT, M8X 25 PLATED	2							
13	1	26106-080452	BOLT, M8X 45 PLATED	16							
14	1	26106-080502	BOLT, M8X 50 PLATED	4							
15	1	129100-01580	PIN, M8X16	2							
16	1	129100-01640	CASE ASSY, OIL SEAL	1							
18	2	129795-01780	SEAL, OIL	1							
19	1	129486-01670	BOLT, M8X30	6							
20	1	26106-080352	BOLT, M8X 35 PLATED	3							

N:Old $\frac{YBS}{100}$ New, Q:Old $\frac{H10}{100}$ New, R:Old $\frac{YBS}{100}$ New, S:Old $\frac{H10}{100}$ New, W:Add, Z:Discontinued, F:Interchangeable by set, K:Q'ty Change
Copyright (C) YANMAR CO., LTD. All Rights Reserved.

0CW10-M76600

Fig.4. CYLINDER HEAD & BONNET

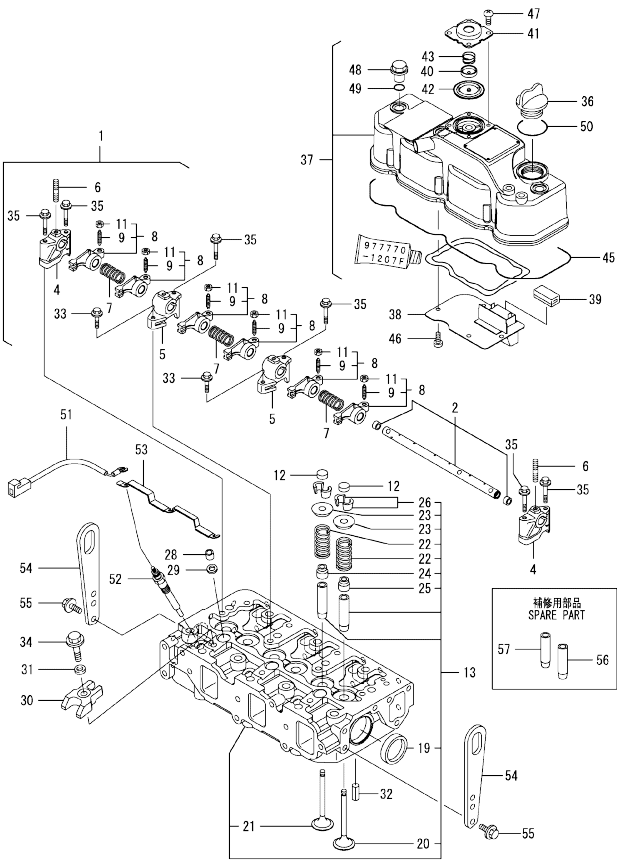


Remarks
(1)Spare part.

No.	Lev.	Parts No.	Description	Q'ty						I	R
				(A)	(B)	(C)	(D)	(E)	(F)		
1	1	129004-11241	SHAFT ASSY, ROCKER	1							
2	2	129004-11251	SHAFT, ROCKER ARM	1							
4	2	119802-11260	SUPPORT, ROCKER ARM	2							
5	2	119802-11270	SUPPORT, ROCKER ARM	2							
6	2	119802-11280	STUD	3							
7	2	129150-11280	SPRING	3							
8	2	129004-11650	ARM, ROCKER	6							
9	3	129150-11230	SCREW, VALVE ADJUST	6							
11	3	129150-11750	NUT, M8	6							
12	1	129150-11370	CAP, VALVE	6							
13	1	129008-11710	HEAD ASSY, CYLINDER	1							
19	2	27241-400000	PLUG, 40	2							
20	2	129005-11100	VALVE, INTAKE	3							
21	2	129100-11112	VALVE, EXHAUST	3							
22	2	129795-11120	SPRING, VALVE	6							
23	2	129795-11180	RETAINER, SPRING	6							
24	2	121400-11340	SEAL, VALVE STEM	3							
25	2	124460-11340	SEAL, VALVE STEM	3							
26	2	27310-080001	COTTER, 8	6							
28	1	119802-11870	PROTECTOR, NOZZLE	3							
29	1	119625-11880	SEAT, NOZZLE	3							
30	1	129004-11900	RETAINER, NOZZLE	3							
31	1	120270-54410	WASHER, INJECTOR	3							
32	1	22351-060012	PIN, SPRING 6.0X12	2							
33	1	26106-080252	BOLT, M8X 25 PLATED	2							
34	1	26106-080352	BOLT, M8X 35 PLATED	3							
35	1	26106-080502	BOLT, M8X 50 PLATED	6							
36	1	124160-01751	COVER, FILLER	1							
37	1	129004-11350	BONNET ASSY, HEAD	1							
38	2	129004-03010	PLATE	1							
39	2	129150-03070	BAFFLE, BREATHER	1							
40	2	119802-03110	PLATE	1							
41	2	119802-03121	COVER, DIAPHRAGM	1							
42	2	119802-03130	DIAPHRAGM	1							
43	2	119802-03141	SPRING, DIAPHRAGM	1							
45	2	129004-11310	GASKET, BONNET	1							
46	2	22857-500100	SCREW, 5X10	4							
47	2	22857-500100	SCREW, 5X10	4							
48	1	124160-11360	KNOB	3							
49	1	24311-000120	O-RING, 1AP12.0	3							
50	1	24311-000320	O-RING, 1AP32.0	1							
51	1	119803-77830	HARNES, WIRE	1							
52	1	129008-77800	PLUG, GLOW	3							
53	1	129008-77820	CONNECTOR, GLOW PLUG	1							
54	1	129900-07900	LIFTER	2							
55	1	26106-080162	BOLT, M8X 16 PLATED	4							
56	1	120130-11860	GUIDE, VALVE	3							1
57	1	129150-11810	GUIDE, VALVE	3							1

N:Old $\frac{100}{100}$ New, Q:Old $\frac{100}{100}$ New, R:Old $\frac{100}{100}$ New, S:Old $\frac{100}{100}$ New, W:Add, Z:Discontinued, F:Interchangeable by set, K:Q'ty Change
Copyright (C) YANMAR CO., LTD. All Rights Reserved.


Fig.5. SUCTION MANIFOLD & AIR CLEANER

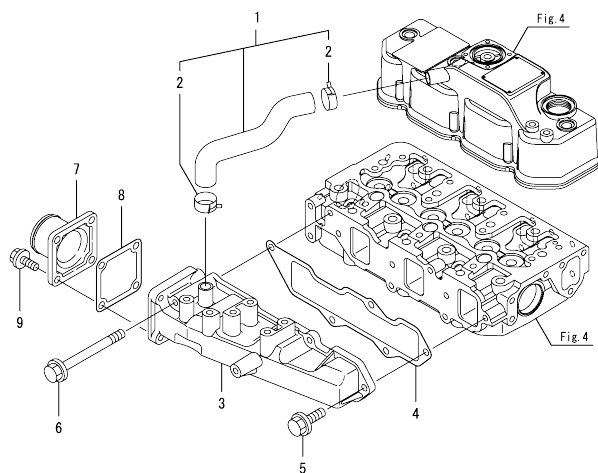

No.	Lev.	Parts No.	Description	(A)=3TNV88-BDTE (B)= (C)=						(D)= (E)= (F)=	I	R
				(A)	(B)	(C)	(D)	(E)	(F)	Qty		
1	1	129004-03080	PIPE, BREATHER	1								
2	2	129410-03990	CLIP	2								
3	1	129004-12101	MANIFOLD, AIR INTAKE	1								
4	1	129001-12110	GASKET, MANIFOLD	1								
5	1	26106-080202	BOLT, M8X 20 PLATED	4								
6	1	26106-080802	BOLT, M8X 80 PLATED	1								
7	1	129486-12581	JOINT, MANIFOLD	1								
8	1	129150-77511	GASKET	1								
9	1	26106-080202	BOLT, M8X 20 PLATED	4								
10	1	129209-12500	CLEANER ASSY, AIR	1								
11	2	129209-12510	BODY, AIR CLEANER	1								
12	2	119808-12520	ELEMENT	1								
13	2	119808-12540	VALVE, UNLOADER	1								
14	2	129209-12540	COVER ASSY	1								
15	2	126650-12680	INDICATOR	1								
16	1	119802-12560	BRACKET, AIR CLEANER	1								
17	1	23000-060000	CLAMP, 60	2								

N:Old $\xleftrightarrow[\text{No}]{\text{Yes}}$ New, Q:Old $\xleftrightarrow[\text{Yes}]{\text{No}}$ New, R:Old $\xleftrightarrow[\text{Yes}]{\text{No}}$ New, S:Old $\xleftrightarrow[\text{No}]{\text{Yes}}$ New, W:Add, Z:Discontinued, F:Interchangeable by set, K:Q'ty Change


Copyright (C) YANMAR CO., LTD. All Rights Reserved.

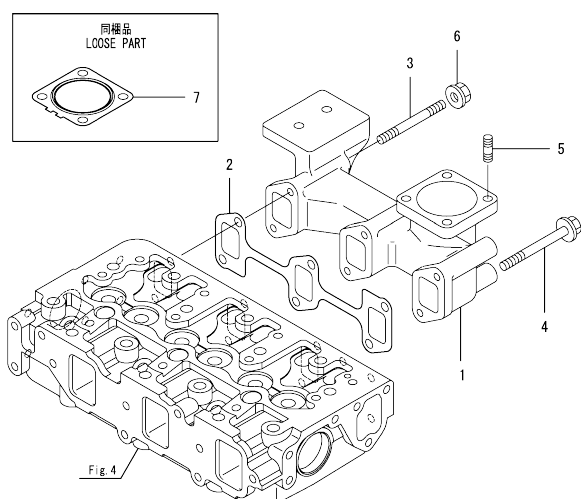

				(A)=3TNV88-BDTE						(D)=	
				(B)=						(E)=	
				(C)=						(F)=	
No.	Lev.	Parts No.	Description	Q'ty						I	R
				(A)	(B)	(C)	(D)	(E)	(F)		
1	1	129004-13109	MANIFOLD, EXHAUST	1							
2	1	129150-13110	GASKET	1							
3	1	123900-13610	STUD, M8X80	2							
4	1	123900-13630	BOLT, M8X80	4							
5	1	119131-18320	STUD, M6X22	4							
6	1	26306-080002	NUT, M8	2							
7	1	129004-13200	GASKET, SILENCER	1							

0CW10-M76600

Fig.7. CAMSHAFT & DRIVING GEAR

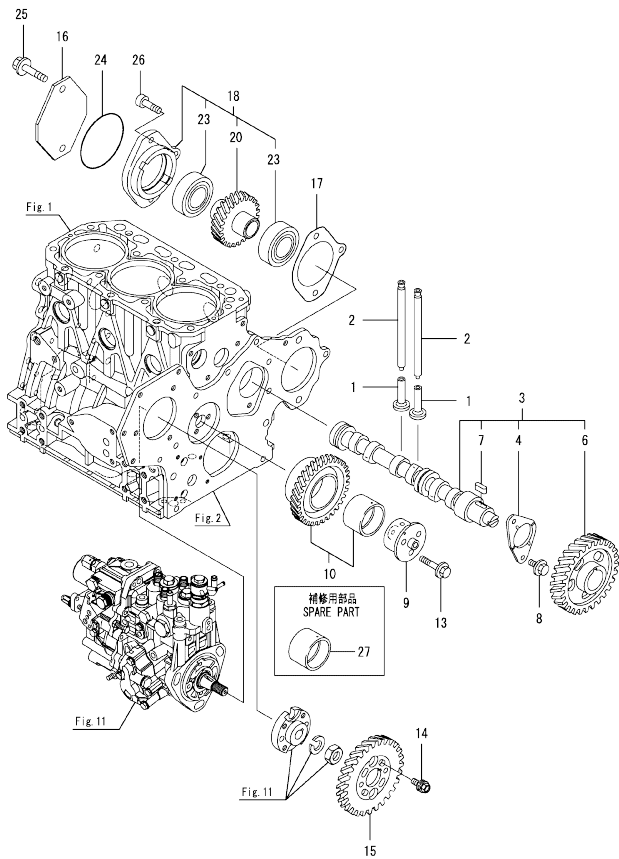


Remarks
(1)Spare part.

No.	Lev.	Parts No.	Description	Q'ty						I	R
				(A)	(B)	(C)	(D)	(E)	(F)		
1	1	129150-14200	TAPPET	6							
2	1	129150-14400	ROD, PUSH L=178	6							
3	1	129129-14580	CAMSHAFT ASSY	1							
4	2	129150-02450	BEARING, THRUST	1							
6	2	129150-14101	GEAR, CAMSHAFT	1							
7	2	22512-070140	KEY, 7X 14	1							
8	1	26106-080142	BOLT, M8X 14 PLATED	2							
9	1	119803-25050	SHAFT, IDLE	1							
10	1	119802-25101	GEAR ASSY, IDLE	1							
13	1	26106-080402	BOLT, M8X 40 PLATED	3							
14	1	129150-25301	BOLT	4							
15	1	119802-25901	GEAR, PUMP	1							
16	1	121023-26071	COVER	1							
17	1	171353-26081	GASKET	1							
18	1	129484-26200	DRIVE ASSY, PUMP	1							
20	2	129484-26210	GEAR ASSY	1							
23	2	24105-060064	BEARING, BALL 6006Z	2							
24	1	24321-000850	O-RING, 1AG85.0	1							
25	1	26106-100452	BOLT, M10X 45 PLATED	2							
26	1	26450-080282	BOLT, M8X 28	1							
27	1	119802-25071	BUSH, IDLE GEAR	1							1

N:Old $\frac{NBS}{100}$ New, Q:Old $\frac{HQ}{100}$ New, R:Old $\frac{RBS}{100}$ New, S:Old $\frac{HS}{100}$ New, W:Add, Z:Discontinued, F:Interchangeable by set, K:Q'ty Change
Copyright (C) YANMAR CO., LTD. All RightsReserved.

0CW10-M76600

Fig.8. CRANKSHAFT & PISTON

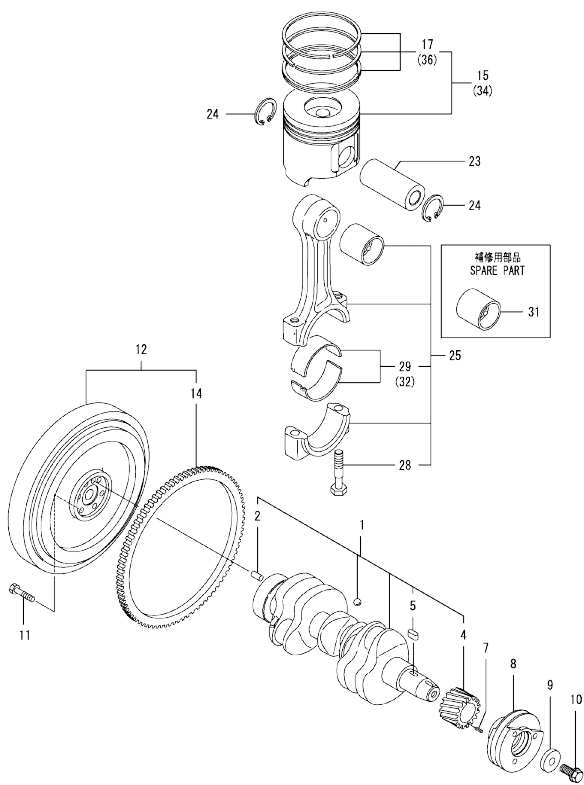


Remarks
(1)Spare part.
(2)Under-sized(U.S.=0.25)part.
(3)Over-sized(O.S.=0.25)part.

No.	Lev.	Parts No.	Description	(A)=3TNV88-BDTE (B)= (C)=						Q'ty	I	R
				(A)	(B)	(C)	(D)	(E)	(F)			
1	1	129008-21000	CRANKSHAFT ASSY	1								
2	2	129100-01580	PIN, M8X16	1								
4	2	119803-21200	GEAR, CRANKSHAFT	1								
5	2	22512-070140	KEY, 7X 14	1								
7	1	22351-030010	PIN, SPRING 3.0X10	1								
8	1	129004-21650	V-PULLEY, 110	1								
9	1	129795-21661	WASHER	1								
10	1	121850-21680	BOLT	1								
11	1	121111-21501	BOLT, FLYWHEEL	6								
12	1	171340-21580	FLYWHEEL ASSY	1								
14	2	119865-21600	GEAR, RING	1								
15	1	129005-22080	PISTON ASSY	3								
17	2	129005-22500	RING SET, PISTON	3								
23	1	129202-22300	PIN, PISTON D26 L70	3								
24	1	22252-000260	RING, 26	6								
25	1	729402-23100	ROD ASSY, CONNECTING	3								
28	2	121550-23200	BOLT, CONNECTING ROD	6								
29	2	129150-23601	BEARING, CRANK PIN	3								
31	1	129100-23910	BEARING, PISTON PIN	3								1
32	1	129150-23611	BEARING, 0.25 US	3								2
34	1	129005-22900	PISTON ASSY, 0.25 OS	3								3
36	2	129005-22950	RING SET, 0.25 OS	3								3

0CW10-M76600

Fig.9. LUB.OIL SYSTEM

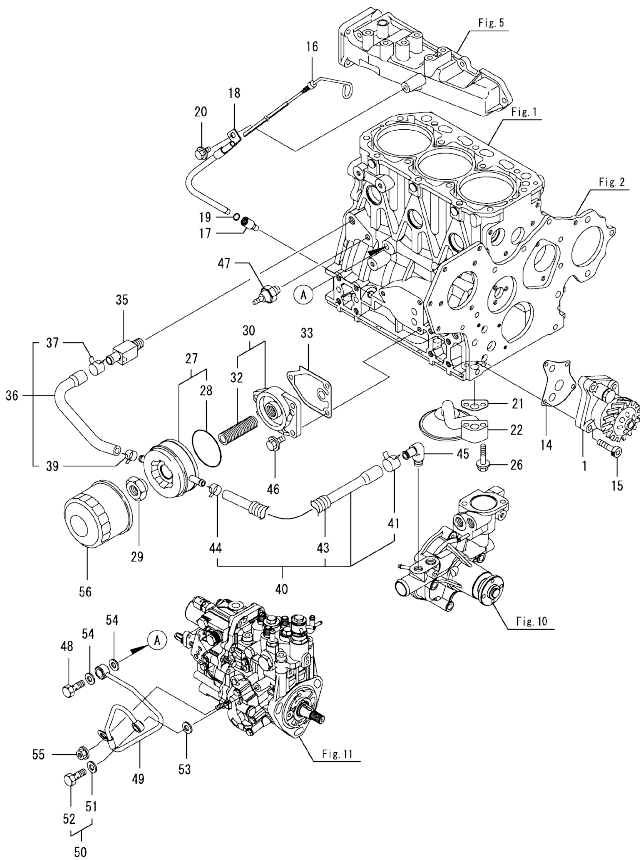


Remarks
(1)Spare part.

No.	Lev.	Parts No.	Description	Q'ty						I	R
				(A)	(B)	(C)	(D)	(E)	(F)		
1	1	129001-32001	PUMP ASSY, OIL	1							
14	1	129150-32020	GASKET, PUMP	1							
15	1	26450-060252	BOLT, M6X 25	4							
16	1	129602-34801	DIPSTICK, OIL	1							
17	1	119260-34810	GUIDE, DIPSTICK	1							
18	1	119802-34850	GUIDE, DIPSTICK	1							
19	1	24316-240100	O-RING, 4DP10A	1							
20	1	26106-080162	BOLT, M8X 16 PLATED	1							
21	1	129150-35042	GASKET	1							
22	1	129150-35091	PIPE ASSY, OIL INLET	1							
26	1	26106-080352	BOLT, M8X 35 PLATED	2							
27	1	129508-33010	COOLER ASSY, OIL	1							
28	2	129508-33050	O-RING	1							
29	1	129417-33111	NUT, OIL COOLER	1							
30	1	129006-35100	BRACKET ASSY, FILTER	1							
32	2	129417-35150	STUD, L=67	1							
33	1	129150-35111	GASKET	1							
35	1	129006-44480	JOINT	1							
36	1	129508-49030	PIPE ASSY, WATER	1							
37	2	171008-03990	CLIP, HOSE 18.5	1							
39	2	23080-015000	CLAMP, 15	1							
40	1	129006-49040	PIPE ASSY, WATER	1							
41	2	171008-03990	CLIP, HOSE 18.5	1							
43	2	129642-49180	TUBE, CORRUGATED	1							
44	2	23080-015000	CLAMP, 15	1							
45	1	129103-49301	ELBOW, PT1/4	1							
46	1	26106-080202	BOLT, M8X 20 PLATED	3							
47	1	114250-39450	SWITCH, 0.5KG	1							
48	1	124160-39140	BOLT, PIPE JOINT M10	1							
49	1	119802-39450	PIPE ASSY, OIL	1							
50	1	129005-59830	BOLT ASSY, JOINT M8	1							
51	2	22190-080002	WASHER, SEAL 6	1							
52	2	23857-030000	BOLT, JOINT 3	1							
53	1	22190-080002	WASHER, SEAL 6	1							
54	1	22190-100002	WASHER, SEAL 10	2							
55	1	26366-060002	NUT, M6	1							
56	1	129150-35153	FILTER	1							1

N:Old $\frac{100}{100}$ New, Q:Old $\frac{100}{100}$ New, R:Old $\frac{100}{100}$ New, S:Old $\frac{100}{100}$ New, W:Add, Z:Discontinued, F:Interchangeable by set, K:Q'ty Change
Copyright (C) YANMAR CO., LTD. All Rights Reserved.

Fig.10. COOLING WATER SYSTEM

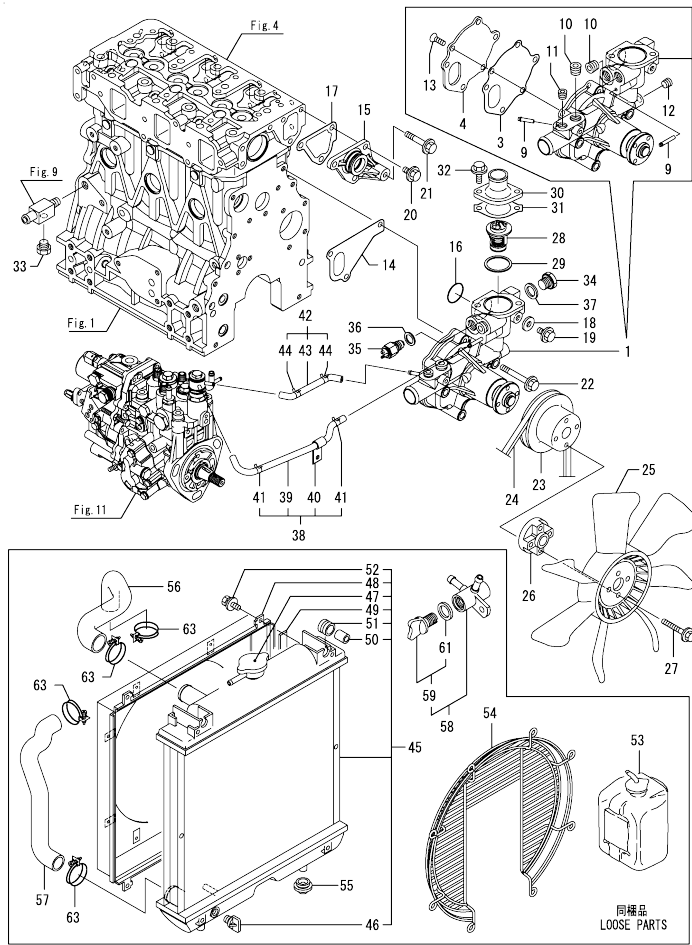

No.	Lev.	Parts No.	Description	Q'ty						I	R
				(A)	(B)	(C)	(D)	(E)	(F)		
1	1	129004-42001	PUMP ASSY, WATER	1							
3	2	129100-42051	GASKET, WATER PUMP	1							
4	2	129100-42121	PLATE	1							
9	2	119802-49113	JOINT, PIPE	2							
10	2	129916-49740	PLUG, R03	2							
11	2	23875-020000	PLUG, R02	1							
12	2	23876-010000	PLUG, R01	1							
13	2	26577-060142	SCREW M 6X 14	3							
14	1	129486-42021	GASKET, WATER PUMP	1							
15	1	129004-42040	JOINT	1							
16	1	129486-42140	O-RING, G30	1							
17	1	124395-49840	GASKET	1							
18	1	23414-080000	GASKET, 8X1.0	1							
19	1	26106-080122	BOLT, M8X 12 PLATED	1							
20	1	26106-080162	BOLT, M8X 16 PLATED	3							
21	1	26106-080452	BOLT, M8X 45 PLATED	1							
22	1	26106-080602	BOLT, M8X 60 PLATED	3							
23	1	129403-42380	V-PULLEY, D=110	1							
24	1	119865-42290	V-BELT, A36.5	1							
25	1	121267-44741	FAN, COOLING D=360	1							
26	1	121267-44760	SPACER	1							
27	1	26106-060302	BOLT, M6X 30 PLATED	4							
28	1	129155-49801	THERMOSTAT, 71	1							
29	1	129150-49811	GASKET, THERMOSTAT	1							
30	1	129350-49530	COVER, THERMOSTAT	1							
31	1	129795-49551	GASKET	1							
32	1	26106-080222	BOLT, M8X 22 PLATED	2							
33	1	171056-49120	PLUG, DRAIN	1							
34	1	121450-42450	PLUG, M16	1							
35	1	121250-44901	SWITCH, 110	1							
36	1	124465-44950	GASKET, 16	1							
37	1	124465-44950	GASKET, 16	1							
38	1	129004-49610	PIPE ASSY, WATER	1							
39	2	129004-49711	PIPE ASSY, WATER	1							
40	2	119802-49730	RETAINER, PIPE	1							
41	2	124722-59050	CLIP, HOSE 9	2							
42	1	129004-49620	PIPE ASSY, WATER	1							
43	2	129004-49721	PIPE ASSY, WATER	1							
44	2	124722-59050	CLIP, HOSE 9	2							
45	1	129044-44500	RADIATOR ASSY	1							
46	2	129508-44550	COCK ASSY	1							
47	2	129107-44590	CAP, RADIATOR	1							
48	2	129044-44600	SHROUD	1							
49	2	129601-44610	GASKET	2							
50	2	118400-44670	COLLAR	2							
51	2	118400-44720	MOUNT, RUBBER	2							
52	2	26014-060122	BOLT, M6X 12	4							
53	1	120445-44530	TANK, SUB	1							
54	1	129601-44570	GUARD	1							
55	1	119255-44660	ABSORBER	2							
56	1	129612-49030	PIPE, WATER	1							


N:Old $\frac{100}{100}$ New, Q:Old $\frac{100}{100}$ New, R:Old $\frac{100}{100}$ New, S:Old $\frac{100}{100}$ New, W:Add, Z:Discontinued, F:Interchangeable by set, K:Q'ty Change
++ CONTINUE ++
Copyright (C) YANMAR CO., LTD. All Rights Reserved.



				(A)=3TNV88-BDTE (B)= (C)=	(D)= (E)= (F)=						
No.	Lev.	Parts No.	Description	(A)	(B)	(C)	Q'ty (D)	(E)	(F)	I	R
57	1	129612-49040	PIPE, WATER	1							
58	1	129150-49100	COCK ASSY, 3-WAY	1							
59	2	129150-49080	COCK, DRAIN	1							
61	3	119629-49080	GASKET	1							
63	1	23010-038000	CLAMP, 38	4							

N:Old $\xrightarrow[\text{No}]{\text{Yes}}$ New, Q:Old $\xrightarrow[\text{Yes}]{\text{No}}$ New, R:Old $\xrightarrow[\text{Yes}]{\text{Yes}}$ New, S:Old $\xrightarrow[\text{No}]{\text{No}}$ New, W:Add, Z:Discontinued, F:Interchangeable by set, K:Q'ty Change


Fig.11. FUEL INJECTION PUMP

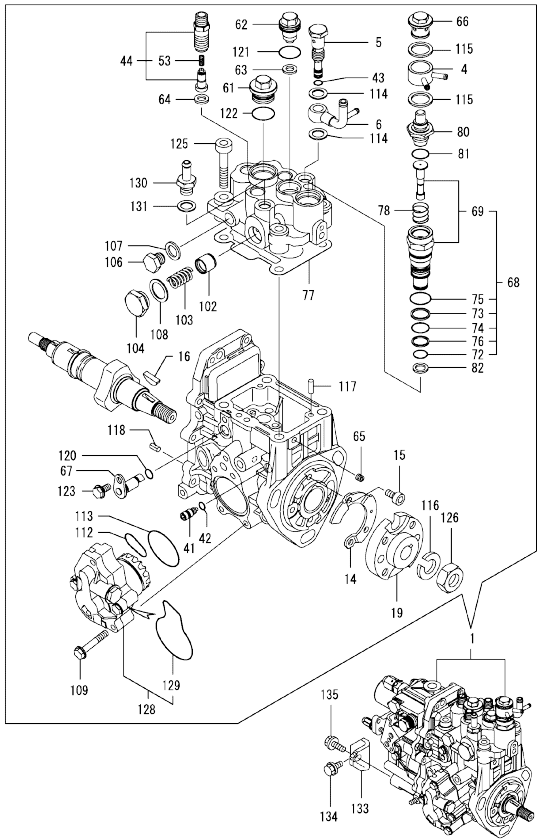

Remarks
(1)Governor(Fig.12)is incorporated in this Fuel Injection Pump (Ref.1).

No.	Lev.	Parts No.	Description	Q'ty						I	R
				(A)	(B)	(C)	(D)	(E)	(F)		
1	1	729285-51301	PUMP ASSY, INJECTION	1							1
4	2	158553-51551	JOINT	1							
5	2	158601-51650	JOINT, OVER FLOW	1							
6	2	158552-51670	JOINT, OVER FLOW	1							
14	2	129008-51900	COVER, GEAR CASE	1							
15	2	129008-51920	BOLT, M6X10	2							
16	2	119802-51090	KEY, 4X16	1							
19	2	158552-51151	FLANGE	1							
41	2	158600-51270	STOPPER, TAPPET	1							
42	2	158563-51281	O-RING, 4D S6	1							
43	2	158563-51281	O-RING, 4D S6	1							
44	2	129008-51390	VALVE ASSY, DELIVERY	3							
53	3	158563-51330	SPRING, DELIVERY	3							
61	2	158601-51550	PLUG	1							
62	2	119802-51560	PLUG, BARREL	1							
63	2	158552-51571	GASKET	1							
64	2	158552-51571	GASKET	3							
65	2	158557-51570	PLUG	1							
66	2	158601-51570	PLUG	1							
67	2	158552-51580	LIFTER	1							
68	2	119802-51590	TIMER SET	1							
69	3	119802-51600	TIMER ASSY	1							
72	3	158553-51670	O-RING, 1011	1							
73	3	119802-51680	RING, BACK UP	1							
74	3	119802-51690	O-RING	1							
75	3	24356-190200	O-RING, 4D19020	1							
76	3	24372-000150	RING, BACK UP T2P15	1							
77	2	158552-51600	GASKET	1							
78	2	158553-51630	SPRING, TIMER	1							
80	2	158553-51650	ELEMENT	1							
81	2	158553-51660	O-RING, P14	1							
82	2	158553-51680	GASKET	1							
102	2	158601-51770	PISTON	1							
103	2	158552-51781	SPRING	1							
104	2	158601-51790	PLUG	1							
106	2	158553-51930	PLUG, M12	1							
107	2	22190-120002	WASHER, SEAL 12	1							
108	2	22190-180002	WASHER, SEAL 18	1							
109	2	158553-51770	BOLT	4							
112	2	158552-52311	O-RING	1							
113	2	158552-52400	O-RING, 4E S42	1							
114	2	22190-120002	WASHER, SEAL 12	2							
115	2	22190-180002	WASHER, SEAL 18	2							
116	2	22217-140000	WASHER, SPRING 14	1							
117	2	22312-050140	PIN, PARALLEL M5X14	2							
118	2	22351-050010	PIN, SPRING 5.0X10	2							
120	2	24311-000070	O-RING, 1AP7.0	1							
121	2	24356-190180	O-RING, 4D19018	1							
122	2	24356-190200	O-RING, 4D19020	1							
123	2	26106-060102	BOLT, M6X 10 PLATED	1							
125	2	26450-080452	BOLT, M8X 45	4							

N:Old $\frac{100}{100}$ New, Q:Old $\frac{100}{100}$ New, R:Old $\frac{100}{100}$ New, S:Old $\frac{100}{100}$ New, W:Add, Z:Discontinued, F:Interchangeable by set, K:Q'ty Change
++ CONTINUE ++
Copyright (C) YANMAR CO., LTD. All Rights Reserved.

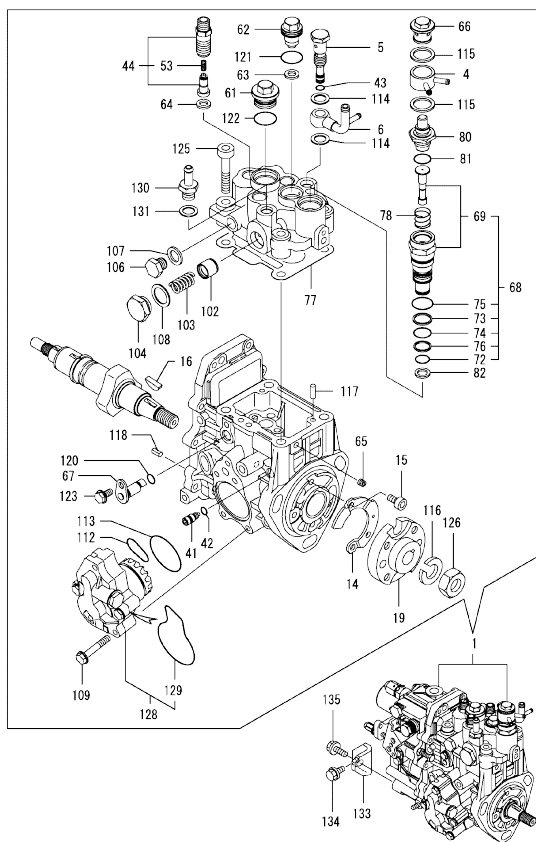


				(A)=3TNV88-BDTE (B)= (C)=	(D)= (E)= (F)=						
No.	Lev.	Parts No.	Description	(A)	(B)	(C)	Q'ty (D)	(E)	(F)	I	R
126	2	26776-140002	NUT, LOCK M14	1							
128	2	158552-52100	PUMP ASSY, FUEL FEED	1							
129	3	158552-52500	O-RING	1							
130	2	119934-59910	JOINT, PIPE	1							
131	2	22190-120002	WASHER, SEAL 12	1							
133	1	119802-51250	RETAINER, PUMP	1							
134	1	26106-080162	BOLT, M&X 16 PLATED	1							
135	1	26106-080202	BOLT, M&X 20 PLATED	1							

Remarks
(1)Governor(Fig.12)is incorporated in this Fuel Injection Pump (Ref.1).

N:Old $\xleftrightarrow[\text{No}]{\text{Yes}}$ New. Q:Old $\xleftrightarrow[\text{Yes}]{\text{No}}$ New. R:Old $\xleftrightarrow[\text{Yes}]{\text{No}}$ New. S:Old $\xleftrightarrow[\text{No}]{\text{Yes}}$ New. W:Add. Z:Discontinued. F:Interchangeable by set. K:Q'ty Change


Fig.12. GOVERNOR

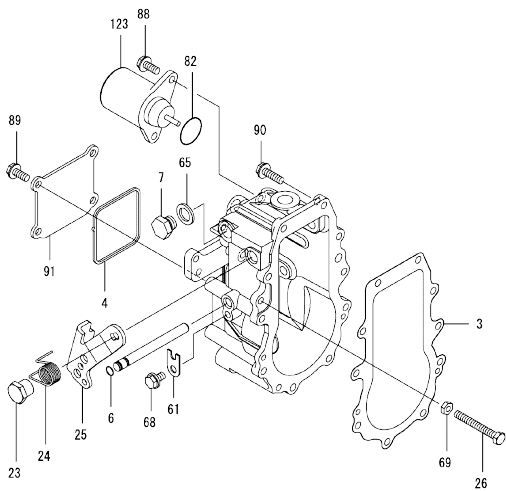

Remarks
*This figure(Governor)is incorporated
in the Fuel Injection Pump (Fig.11).

No.	Lev.	Parts No.	Description	Q'ty						I	R
				(A)	(B)	(C)	(D)	(E)	(F)		
3	2	158553-61050	GASKET	1							
4	2	158553-61070	GASKET	1							
6	2	129155-51280	O-RING, S6	1							
7	2	158553-51930	PLUG, M12	1							
23	2	129255-61410	NUT, LOCK	1							
24	2	119807-61420	SPRING, RETURN	1							
25	2	158552-61441	LEVER, REGULATOR	1							
26	2	129155-61460	BOLT, IDLE	1							
61	2	119660-61901	RETAINER, SHAFT	1							
65	2	22190-120002	WASHER, SEAL 12	1							
68	2	26106-060102	BOLT, M6X 10 PLATED	1							
69	2	26756-060002	NUT, LOCK M6	1							
82	2	158552-61900	O-RING	1							
88	2	26106-060142	BOLT, M6X 14 PLATED	2							
89	2	26106-060142	BOLT, M6X 14 PLATED	4							
90	2	26106-060202	BOLT, M6X 20 PLATED	10							
91	2	129642-61060	COVER, GOVERNOR CASE	1							
123	2	119653-77950	SOLENOID, STOP	1							

Fig.13. FUEL INJECTION VALVE

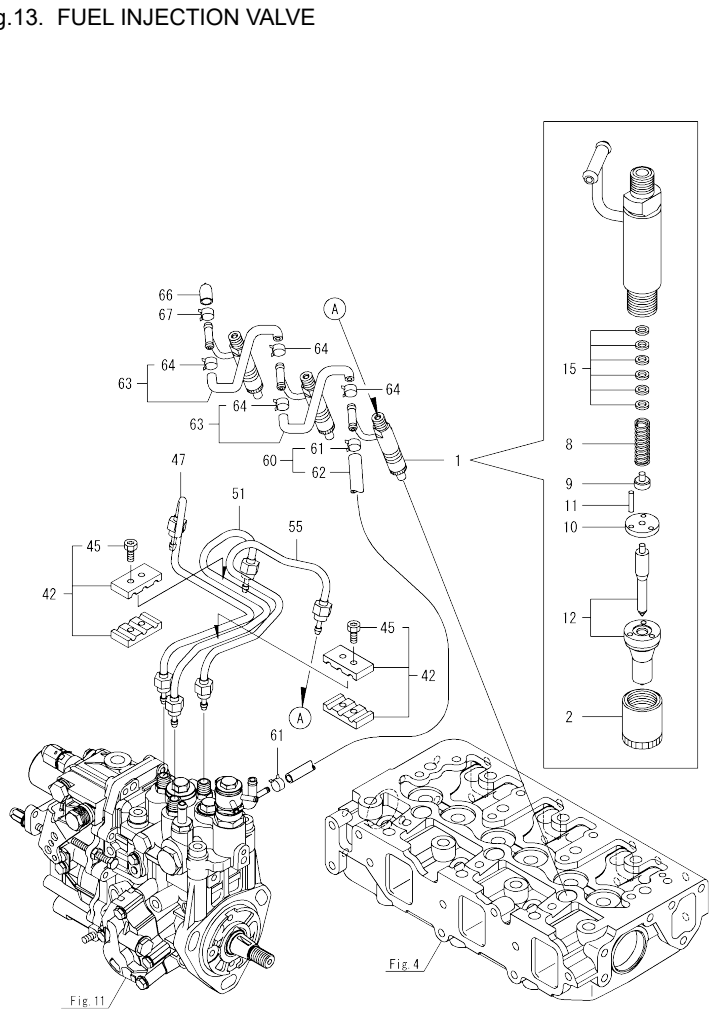



No.	Lev.	Parts No.	Description	Q'ty						I	R
				(A)	(B)	(C)	(D)	(E)	(F)		
1	1	729604-53400	VALVE ASSY,INJECTION	3							
2	2	114250-53080	NUT, NOZZLE D16.95	3							
8	2	114250-53120	SPRING, NOZZLE	3							
9	2	114250-53130	SEAT, SPRING	3							
10	2	114250-53140	PLATE	3							
11	2	114250-53210	PIN	6							
12	2	129604-53300	VALVE ASSY,INJECTION	3							
15	2	119803-53400	SHIM SET	3							
42	1	129150-59120	RETAINER, PIPE	2							
45	2	129150-59131	BOLT, M4X14	4							
47	1	129004-59811	PIPE ASSY, INJECTION	1							
51	1	129004-59821	PIPE ASSY, INJECTION	1							
55	1	129004-59831	PIPE ASSY, INJECTION	1							
60	1	119802-59550	PIPE ASSY, RETURN	1							
61	2	124722-59050	CLIP, HOSE 9	2							
62	2	119802-59560	PIPE, FUEL RETURN	1							
63	1	129486-59551	PIPE ASSY, RETURN	2							
64	2	124722-59050	CLIP, HOSE 9	4							
66	1	119593-59581	CAP	1							
67	1	124060-77680	CLIP, HOSE 10	1							

N:Old $\frac{100}{100}$ New, Q:Old $\frac{100}{100}$ New, R:Old $\frac{100}{100}$ New, S:Old $\frac{100}{100}$ New, W:Add, Z:Discontinued, F:Interchangeable by set, K:Q'ty Change

Copyright (C) YANMAR CO., LTD. All Rights Reserved.

0CW10-M76600


Fig.14. FUEL LINE

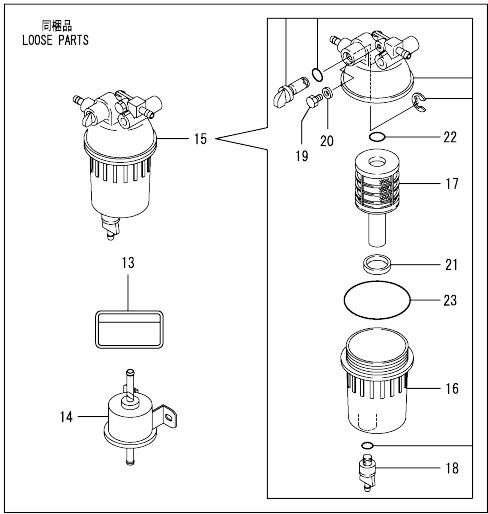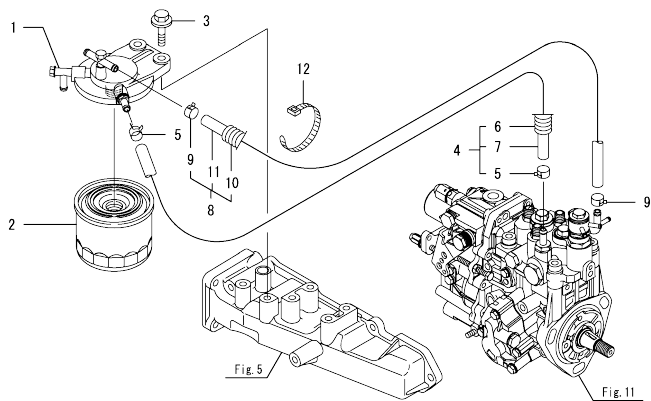

No.	Lev.	Parts No.	Description	Q'ty						I	R
				(A)	(B)	(C)	(D)	(E)	(F)		
1	1	129004-55612	BRACKET, FILTER	1							
2	1	119802-55801	FILTER, FUEL	1							
3	1	26106-080302	BOLT, M8X 30 PLATED	2							
4	1	129044-59010	PIPE, D13/7.5X220	1							
5	2	124766-59050	CLIP, HOSE 12	2							
6	2	129044-59100	TUBE, CORRUGATED	1							
7	2	129044-59510	PIPE, FUEL 220	1							
8	1	129950-59311	PIPE, FUEL	1							
9	2	124766-59050	CLIP, HOSE 12	2							
10	2	129961-59110	TUBE, CORRUGATED	1							
11	2	105025-59580	PIPE, FUEL	1							
12	1	121750-59890	BAND, 140	1							
13	1	114110-07761	LABEL, FUEL OIL CAUT	1							
14	1	119225-52102	PUMP ASSY, FUEL FEED	1							
15	1	129242-55701	SEPARATOR ASSY	1							
16	2	129242-55720	CUP	1							
17	2	129242-55730	ELEMENT	1							
18	2	129242-55740	PLUG, DRAIN	1							
19	2	129242-55750	VALVE, AIR VENT	1							
20	2	129242-55760	GASKET	1							
21	2	129242-55770	FLOAT	1							
22	2	24311-000160	O-RING, 1AP16.0	1							
23	2	24321-000750	O-RING, 1AG75.0	1							

0CW10-M76600




Fig.15. STARTING MOTOR

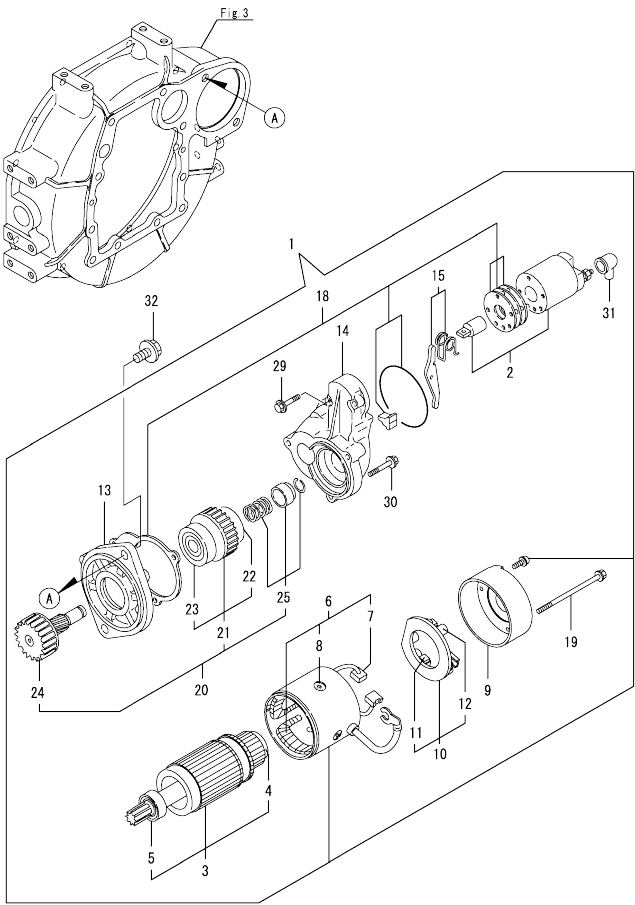

No.	Lev.	Parts No.	Description	Q'ty						I	R
				(A)	(B)	(C)	(D)	(E)	(F)		
1	1	129136-77011	STARTER	1							
2	2	129136-77310	SWITCH ASSY	1							
3	2	129900-77400	ARMATURE ASSY	1							
4	3	X2130350900	BEARING, BALL	1							
5	3	X2114255110	BEARING, BALL	1							
6	2	129900-77440	COIL ASSY, FIELD	1							
7	3	129900-77450	BRUSH	2							
8	3	171008-77450	SCREW	4							
9	2	129900-77460	COVER	1							
10	2	129900-77480	HOLDER ASSY, BRUSH	1							
11	3	129900-77450	BRUSH	2							
12	3	129400-77490	SPRING	4							
13	2	171008-77510	CASE, GEAR	1							
14	2	129136-77520	HOUSING	1							
15	2	171008-77540	LEVER SET	1							
18	2	129400-77571	COVER ASSY, DUST	1							
19	2	129900-77640	BOLT, THROUGH	2							
20	2	171008-77650	PINION ASSY	1							
21	3	X2114555500	CLUTCH ASSY	1							
22	4	X2114955020	BEARING, BALL	1							
23	4	X2240410100	BEARING, BALL	1							
24	3	171008-77660	SHAFT	1							
25	3	171008-77670	STOPPER SET	1							
29	2	26106-060322	BOLT, M6X 32 PLATED	2							
30	2	26106-060402	BOLT, M6X 40 PLATED	3							
31	2	171008-77750	COVER	1							
32	1	26106-120252	BOLT, M12X 25 PLATED	2							

0CW10-M76600



Fig.16. GENERATOR

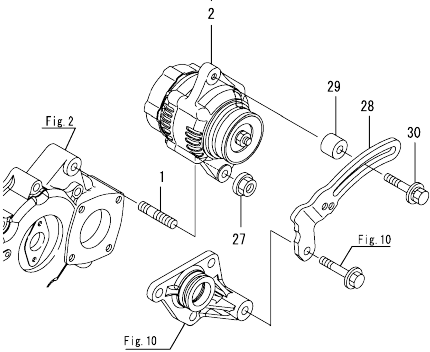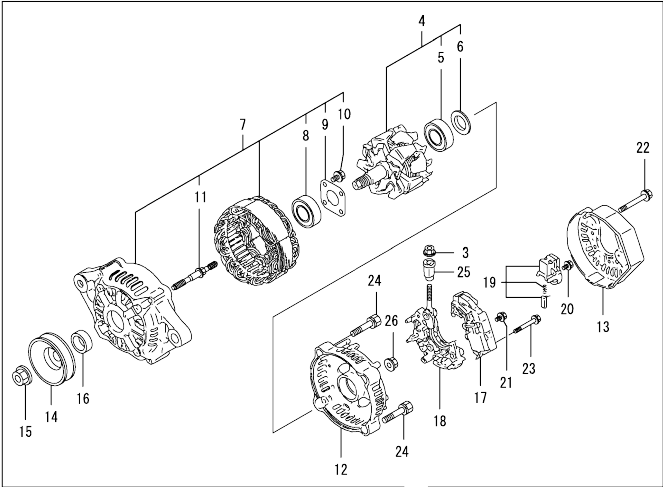

No.	Lev.	Parts No.	Description	Q'ty						I	R
				(A)	(B)	(C)	(D)	(E)	(F)		
1	1	129795-01900	STUD	1							
2	1	119626-77210	ALTERNATOR, 12V-55A	1							
3	2	X9490561001	NUT	1							
4	2	129052-77380	ROTOR ASSY	1							
5	3	123501-79240	BEARING, BALL	1							
6	3	119620-79250	COVER	1							
7	2	129052-77422	FRAME ASSY	1							
8	3	119620-79200	BEARING, BALL	1							
9	3	119620-79210	PLATE, RETAINER	1							
10	3	119620-79220	SCREW	4							
11	3	119620-79230	STUD	2							
12	2	128401-77440	FRAME	1							
13	2	119626-77450	COVER	1							
14	2	119620-77461	PULLEY	1							
15	2	119620-77471	NUT	1							
16	2	119620-77490	COLLAR	1							
17	2	119626-77710	REGULATOR ASSY	1							
18	2	129052-79260	HOLDER	1							
19	2	129052-79270	HOLDER, BRUSH	1							
20	2	119620-79290	SCREW	6							
21	2	119620-79300	SCREW	1							
22	2	119620-79310	BOLT	3							
23	2	119620-79320	SCREW	2							
24	2	119620-79330	BOLT	2							
25	2	119620-79340	BUSH, INSULATION	1							
26	2	119620-79350	NUT	2							
27	1	26306-100002	NUT, M10	1							
28	1	129064-77330	ADJUSTER	1							
29	1	129067-77340	SPACER	1							
30	1	129972-77341	BOLT, ADJUSTER L=50	1							
31	1	119643-66900	DIODE	1							
32	1	119802-77200	RELAY, SAFETY	1							
33	1	119650-77911	RELAY ASSY, GLOW	1							
36	1	128300-77920	TIMER	1							
37	1	129211-77920	TIMER	1							

0CW10-M76600

Fig.17. GASKET SET

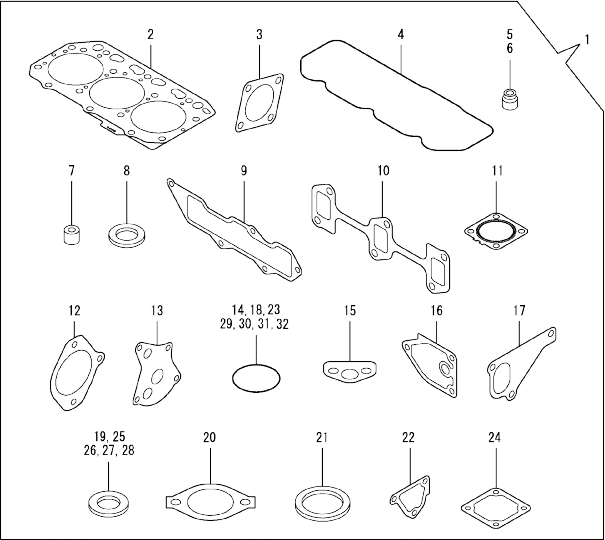

Remarks
(1)Optional parts.

No.	Lev.	Parts No.	Description	Q'ty						I	R
				(A)	(B)	(C)	(D)	(E)	(F)		
1	1	129269-92610	GASKET SET	1							1
2	2	129001-01340	GASKET, HEAD	1							
3	2	129C26-01890	GASKET, HO-P	1							
4	2	129004-11310	GASKET, BONNET	1							
5	2	121400-11340	SEAL, VALVE STEM	3							
6	2	124460-11340	SEAL, VALVE STEM	3							
7	2	119802-11870	PROTECTOR, NOZZLE	3							
8	2	119625-11880	SEAT, NOZZLE	3							
9	2	129001-12110	GASKET, MANIFOLD	1							
10	2	129150-13110	GASKET	1							
11	2	129004-13200	GASKET, SILENCER	1							
12	2	171353-26081	GASKET	1							
13	2	129150-32020	GASKET, PUMP	1							
14	2	119609-32040	O-RING, P16	2							
15	2	129150-35042	GASKET	1							
16	2	129150-35111	GASKET	1							
17	2	129486-42021	GASKET, WATER PUMP	1							
18	2	129486-42140	O-RING, G30	1							
19	2	124465-44950	GASKET, 16	2							
20	2	129795-49551	GASKET	1							
21	2	129150-49811	GASKET, THERMOSTAT	1							
22	2	124395-49840	GASKET	1							
23	2	121850-51960	O-RING	1							
24	2	129150-77511	GASKET	1							
25	2	22190-080002	WASHER, SEAL 6	7							
26	2	22190-100002	WASHER, SEAL 10	2							
27	2	22190-160002	WASHER, SEAL 16	1							
28	2	23414-080000	GASKET, 8X1.0	1							
29	2	24311-000120	O-RING, 1AP12.0	3							
30	2	24311-000320	O-RING, 1AP32.0	2							
31	2	24321-000850	O-RING, 1AG85.0	1							
32	2	24341-000240	O-RING, 1AS24.0	1							
33	1	129400-92430	HONE	1							1
34	1	977770-1207F	GASKET, LIQUID	1							1

N:Old $\frac{YES}{NO}$ New, Q:Old $\frac{YES}{NO}$ New, R:Old $\frac{YES}{NO}$ New, S:Old $\frac{YES}{NO}$ New, W:Add, Z:Discontinued, F:Interchangeable by set, K:Q'ty Change
Copyright (C) YANMAR CO., LTD. All Rights Reserved.

Parts No. Index

Parts No.	Fig. No.	Ref. No.
105025-59580	14	11
114110-07761	14	13
114250-39450	9	47
114250-53080	13	2
114250-53120	13	8
114250-53130	13	9
114250-53140	13	10
114250-53210	13	11
118400-44670	10	50
118400-44720	10	51
119131-18320	6	5
119225-52102	14	14
119255-44660	10	55
119260-34810	9	17
119593-59581	13	66
119609-32040	2	9
	17	14
119620-01750	3	3
119620-77461	16	14
119620-77471	16	15
119620-77490	16	16
119620-79200	16	8
119620-79210	16	9
119620-79220	16	10
119620-79230	16	11
119620-79250	16	6
119620-79290	16	20
119620-79300	16	21
119620-79310	16	22
119620-79320	16	23
119620-79330	16	24
119620-79340	16	25
119620-79350	16	26
119625-11880	4	29
	17	8
119626-77210	16	2
119626-77450	16	13
119626-77710	16	17
119629-49080	10	61
119640-01640	3	8
119643-66900	16	31
119650-77911	16	33
119653-77950	12	123
119660-61901	12	61
119802-01561	2	5
119802-03110	4	40
119802-03121	4	41
119802-03130	4	42
119802-03141	4	43
119802-11260	4	4

Parts No.	Fig. No.	Ref. No.
119802-11270	4	5
119802-11280	4	6
119802-11870	4	28
	17	7
119802-12560	5	16
119802-25071	7	27
119802-25101	7	10
119802-25901	7	15
119802-34850	9	18
119802-39450	9	49
119802-49113	10	9
119802-49730	10	40
119802-51090	11	16
119802-51250	11	133
119802-51560	11	62
119802-51590	11	68
119802-51600	11	69
119802-51680	11	73
119802-51690	11	74
119802-55801	14	2
119802-59550	13	60
119802-59560	13	62
119802-77200	16	32
119803-21200	8	4
119803-25050	7	9
119803-53400	13	15
119803-77830	4	51
119807-61420	12	24
119808-12520	5	12
119808-12540	5	13
119865-21600	8	14
119865-42290	10	24
119934-01800	2	3
119934-59910	11	130
120130-11860	4	56
120270-54410	4	31
120445-44530	10	53
121023-01551	2	22
121023-26071	7	16
121111-21501	8	11
121250-44901	10	35
121267-44741	10	25
121267-44760	10	26
121400-11340	4	24
	17	5
121450-42450	10	34
121550-23200	8	28
121750-59890	14	12
121850-21680	8	10
121850-51960	2	10

Parts No.	Fig. No.	Ref. No.
121850-51960	17	23
123501-79240	16	5
123900-13610	6	3
123900-13630	6	4
124060-01050	1	4
124060-77680	13	67
124160-01751	2	6
	4	36
124160-01910	1	6
		7
124160-11360	4	48
124160-39140	9	48
124240-01871	2	7
		19
124395-49840	10	17
	17	22
124460-11340	4	25
	17	6
124465-44950	10	36
		37
	17	19
124722-59050	10	41
		44
	13	61
		64
124766-59050	14	5
		9
126650-12680	5	15
128300-77920	16	36
128401-77440	16	12
129001-01250	1	5
129001-01340	1	28
	17	2
129001-02931	1	29
129001-12110	5	4
	17	9
129001-32001	9	1
129004-03010	4	38
129004-03080	5	1
129004-11241	4	1
129004-11251	4	2
129004-11310	4	45
	17	4
129004-11350	4	37
129004-11650	4	8
129004-11900	4	30
129004-12101	5	3
129004-13109	6	1
129004-13200	6	7
	17	11

Parts No.	Fig. No.	Ref. No.
129004-21650	8	8
129004-42001	10	1
129004-42040	10	15
129004-49610	10	38
129004-49620	10	42
129004-49711	10	39
129004-49721	10	43
129004-55612	14	1
129004-59811	13	47
129004-59821	13	51
129004-59831	13	55
129005-11100	4	20
129005-22080	8	15
129005-22500	8	17
129005-22900	8	34
129005-22950	8	36
129005-59830	9	50
129006-35100	9	30
129006-44480	9	35
129006-49040	9	40
129008-11710	4	13
129008-21000	8	1
129008-51390	11	44
129008-51900	11	14
129008-51920	11	15
129008-77800	4	52
129008-77820	4	53
129044-44500	10	45
129044-44600	10	48
129044-59010	14	4
129044-59100	14	6
129044-59510	14	7
129052-77380	16	4
129052-77422	16	7
129052-79260	16	18
129052-79270	16	19
129064-77330	16	28
129067-77340	16	29
129100-01580	3	1
		15
	8	2
129100-01640	3	16
129100-01730	3	6
129100-11112	4	21
129100-23910	8	31
129100-42051	10	3
129100-42121	10	4
129103-49301	9	45
129107-44590	10	47
129129-14580	7	3

Parts No. Index

Parts No.	Fig. No.	Ref. No.
129136-77011	15	1
129136-77310	15	2
129136-77520	15	14
129150-01200	1	27
129150-02020	1	9
129150-02450	7	4
129150-02871	1	32
129150-02931	1	24
129150-02941	1	35
129150-03070	4	39
129150-11230	4	9
129150-11280	4	7
129150-11370	4	12
129150-11750	4	11
129150-11810	4	57
129150-13110	6	2
	17	10
129150-14101	7	6
129150-14200	7	1
129150-14400	7	2
129150-23601	8	29
129150-23611	8	32
129150-25301	7	14
129150-32020	9	14
	17	13
129150-35042	9	21
	17	15
129150-35091	9	22
129150-35111	9	33
	17	16
129150-35153	9	56
129150-49080	10	59
129150-49100	10	58
129150-49811	10	29
	17	21
129150-59120	13	42
129150-59131	13	45
129150-77511	5	8
	17	24
129155-49801	10	28
129155-51280	12	6
129155-61460	12	26
129175-01770	3	7
129202-22300	8	23
129209-12500	5	10
129209-12510	5	11
129209-12540	5	14
129211-77920	16	37
129242-55701	14	15
129242-55720	14	16

Parts No.	Fig. No.	Ref. No.
129242-55730	14	17
129242-55740	14	18
129242-55750	14	19
129242-55760	14	20
129242-55770	14	21
129255-61410	12	23
129269-92610	17	1
129350-49530	10	30
129400-77490	15	12
129400-77571	15	18
129400-92430	17	33
129403-42380	10	23
129410-03990	5	2
129417-33111	9	29
129417-35150	9	32
129484-26200	7	18
129484-26210	7	20
129486-01670	3	19
129486-12581	5	7
129486-42021	10	14
	17	17
129486-42140	10	16
	17	18
129486-59551	13	63
129508-33010	9	27
129508-33050	9	28
129508-44550	10	46
129508-49030	9	36
129601-44570	10	54
129601-44610	10	49
129602-34801	9	16
129604-01520	2	4
129604-53300	13	12
129612-01600	3	2
129612-49030	10	56
129612-49040	10	57
129642-49180	9	43
129642-61060	12	91
129795-01780	3	18
129795-01900	16	1
129795-01950	2	8
129795-02412	1	12
129795-11120	4	22
129795-11180	4	23
129795-21661	8	9
129795-49551	10	31
	17	20
129900-07900	4	54
129900-77400	15	3
129900-77440	15	6

Parts No.	Fig. No.	Ref. No.
129900-77450	15	7
		11
129900-77460	15	9
129900-77480	15	10
129900-77640	15	19
129916-49740	10	10
129950-59311	14	8
129961-59110	14	10
129972-77341	16	30
129C26-01890	2	20
	17	3
158552-51151	11	19
158552-51571	11	63
		64
158552-51580	11	67
158552-51600	11	77
158552-51670	11	6
158552-51781	11	103
158552-52100	11	128
158552-52311	11	112
158552-52400	11	113
158552-52500	11	129
158552-61441	12	25
158552-61900	12	82
158553-51551	11	4
158553-51630	11	78
158553-51650	11	80
158553-51660	11	81
158553-51670	11	72
158553-51680	11	82
158553-51770	11	109
158553-51930	11	106
	12	7
158553-61050	12	3
158553-61070	12	4
158557-51570	11	65
158563-51281	11	42
		43
158563-51330	11	53
158600-51270	11	41
158601-51550	11	61
158601-51570	11	66
158601-51650	11	5
158601-51770	11	102
158601-51790	11	104
171008-03990	9	37
		41
171008-77450	15	8
171008-77510	15	13
171008-77540	15	15

Parts No.	Fig. No.	Ref. No.
171008-77650	15	20
171008-77660	15	24
171008-77670	15	25
171008-77750	15	31
171051-01921	1	8
171056-49120	10	33
171340-21580	8	12
171353-26081	7	17
	17	12
22190-080002	2	11
	9	51
		53
	17	25
22190-100002	9	54
	17	26
22190-120002	11	107
		114
		131
	12	65
22190-160002	17	27
22190-180002	11	108
		115
22190-220002	3	10
22217-140000	11	116
22252-000260	8	24
22312-050140	11	117
22351-030010	8	7
22351-050010	11	118
22351-060012	4	32
22512-070140	7	7
	8	5
22857-500100	4	46
		47
23000-060000	5	17
23010-038000	10	63
23080-015000	9	39
		44
23414-080000	10	18
	17	28
23857-030000	9	52
23875-020000	10	11
23876-010000	10	12
24105-060064	7	23
24311-000070	11	120
24311-000120	4	49
	17	29
24311-000160	14	22
24311-000320	2	12
	4	50
	17	30

Parts No. Index

Parts No.	Fig. No.	Ref. No.
24316-240100	9	19
24321-000750	14	23
24321-000850	7	24
	17	31
24341-000240	2	23
	17	32
24356-190180	11	121
24356-190200	11	75
		122
24372-000150	11	76
26014-060122	10	52
26106-060102	11	123
	12	68
26106-060142	12	88
		89
26106-060162	2	24
26106-060202	12	90
26106-060302	10	27
26106-060322	15	29
26106-060402	15	30
26106-080122	10	19
26106-080142	7	8
26106-080162	2	13
		14
		21
	3	11
	4	55
	9	20
	10	20
	11	134
26106-080202	5	5
		9
	9	46
	11	135
26106-080222	10	32
26106-080252	3	12
	4	33
26106-080302	2	15
	14	3
26106-080352	3	20
	4	34
	9	26
26106-080402	7	13
26106-080452	3	13
	10	21
26106-080502	3	14
	4	35
26106-080552	2	16
26106-080602	10	22
26106-080802	5	6

Parts No.	Fig. No.	Ref. No.
26106-080852	2	17
26106-100452	7	25
26106-120252	15	32
26206-100252	3	4
26206-100302	3	5
26306-080002	2	18
	6	6
26306-100002	16	27
26366-060002	9	55
26450-060252	9	15
26450-080282	7	26
26450-080452	11	125
26577-060142	10	13
26756-060002	12	69
26776-140002	11	126
27241-120000	1	13
27241-300000	1	14
27241-400000	4	19
27310-080001	4	26
729005-01560	1	1
729285-51301	11	1
729402-23100	8	25
729604-53400	13	1
729652-01500	2	1
977770-1207F	17	34
X2114255110	15	5
X2114555500	15	21
X2114955020	15	22
X2130350900	15	4
X2240410100	15	23
X9490561001	16	3